

2024-2025
Product Catalog

Your Automated Soldering Partner

Apollo Seiko is Your Automated Soldering Partner



“We constantly continue to challenge ourselves to contribute to the world by offering new technologies”

Apollo Seiko is the creator and worldwide leader of selective soldering solutions.

Our patented technologies and dedication to customer service sets us apart from the competition.

Our company name, “Apollo Seiko” derives from the Apollo space program along with Seiko which means precision movement.

Our vision has always been to invent, build and strive to modernize automated soldering methods that increase throughput and quality by providing a precise, repeatable process.

Since our start-up in 1969, we are committed to the research and development of advanced soldering solutions and building strong partnerships with our customers.



Apollo Seiko Global Family



Product Lineup

Iron Tip Soldering

Substitution of Manual Soldering

P7



J-CAT LYRA

Cell production

P9



OMEGA

In-Line / Unit

P11



SR-LYRA II

In-Line

Iron Tip Soldering

Substitution of Manual Soldering

P12



JS-3 LYRA II

In-Line

P13



L-CAT EVO-II

In-Line / Cell production

P15



J-CAT CMS

Cell production

P18



CMS-1AU

In-Line

Laser Soldering

Non-contact Soldering

P19



STAR GATE

In-Line /
Cell production / Unit

P20



MLU

In-Line /
Cell production / Unit

P23



J-CAT WAVE

Cell production

Induction Heating Soldering

Non-contact / Local Heating

Cartesian Robot Combination Examples

Iron Tip / Laser soldering

P25



JC-3 LYRA II

In-Line / Cell production

Selective Flow

Energy Saving & Eco Solder Bath

P27



AF series

In-Line / Cell production

Desktop Type Selective Flow

Energy Saving & Eco Solder Bath

P31



AF series

Cell production

Soldering Peripheral Equipment

Screw Tightening / Board Cutting etc.

P33



Manual Soldering

Manual Soldering Station

P35



Options

Iron Tip Cleaner / Camera etc.

P37



Consumable Parts

Iron Tip / Solder Wire etc.


P46



Introduction Flow of Automated Soldering

Reliable Support System

We offer Automated Soldering Consultation Services to provide a complete solution from product introduction to installation support.

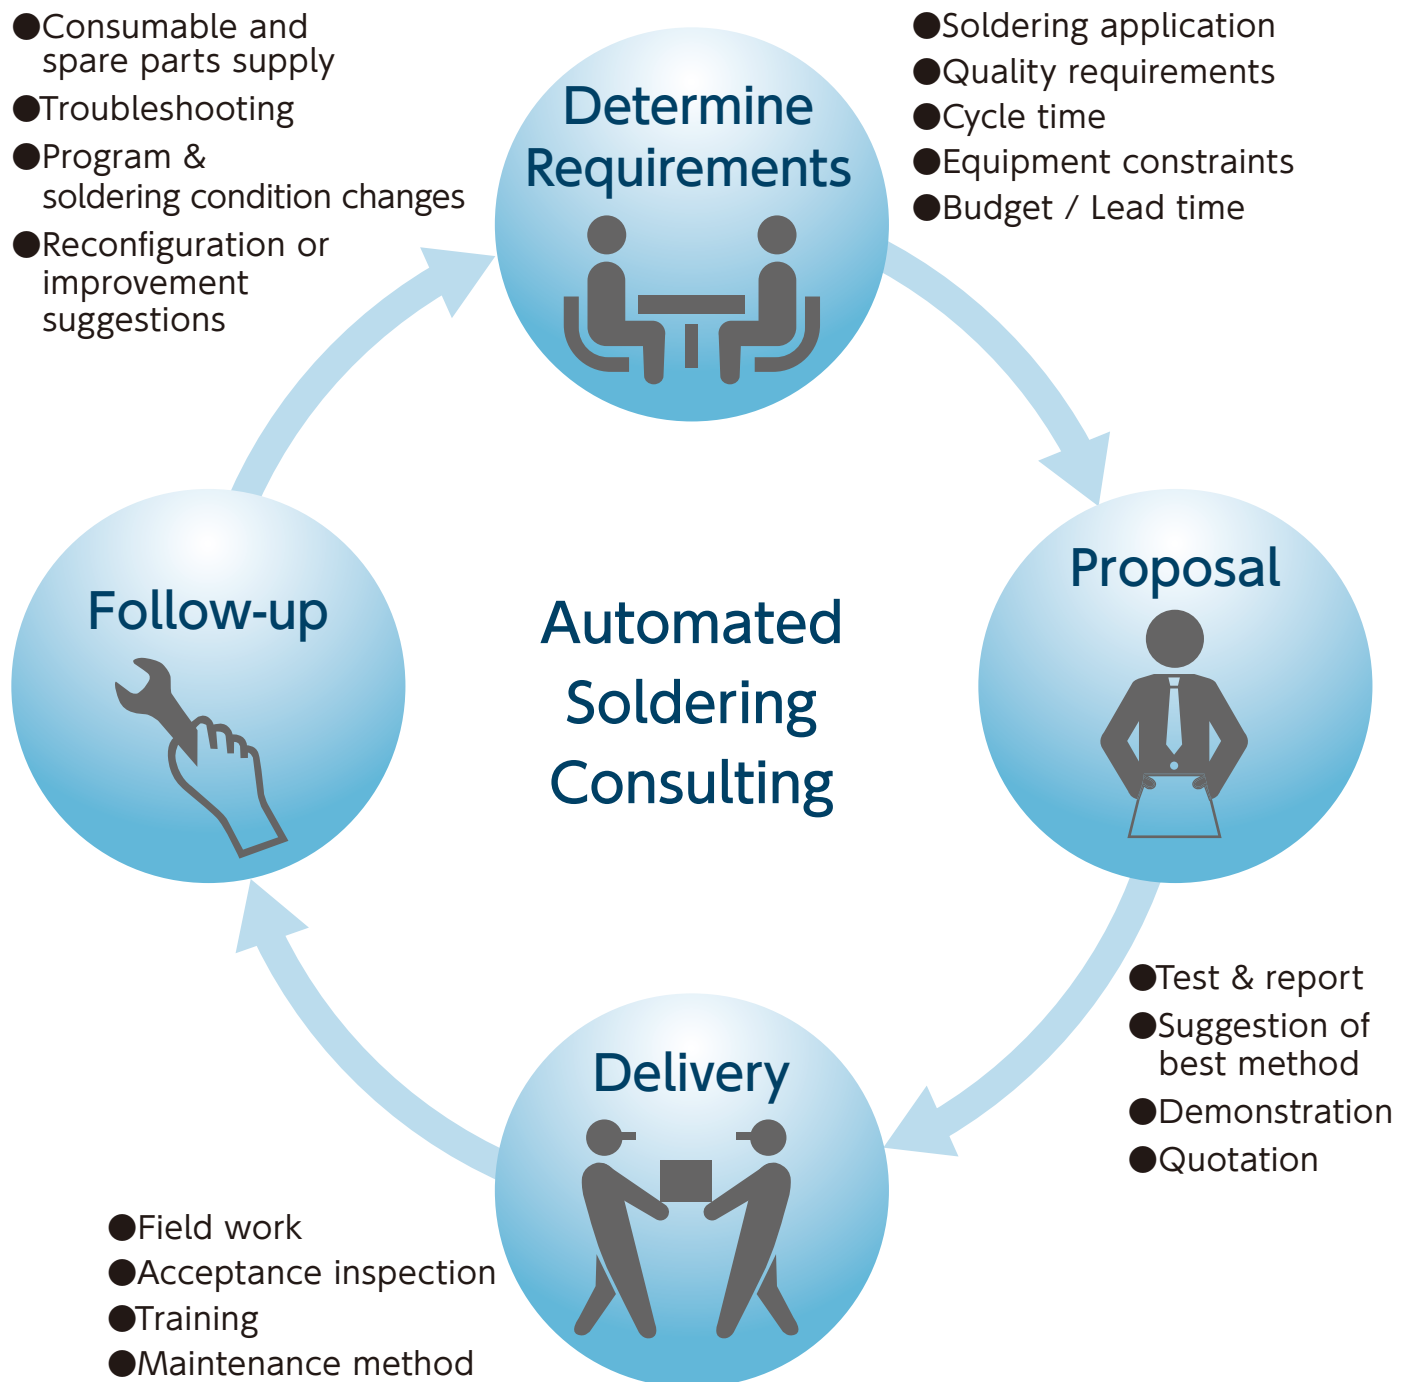

We are always Your Automated Soldering Partner.

Iron Cartridge

Advantage of Apollo Seiko's Iron Soldering

Direct heating system with high-temperature control

The temperature sensor is embedded as close to the apex of the tip as possible. Capable of detecting even the smallest temperature changes.

Just 8 seconds to exchange the iron cartridge without tools

A special key groove allows a precise exchange without position variation.

Nitrogen direct blow DN iron tip

Thanks to the built-in nozzle and slim shape, the nitrogen blow function can be used on iron tips to solder in tight spaces.

Wide variety of iron tip options

We have more than 100 types of standard iron tips. You can select the most appropriate shape and size iron tip for point soldering and slide soldering. Custom-made tips are also available.

Slim cartridge able to solder in tight spaces

The diameter for the DS type is $\Phi 6.4\text{mm}$, and the DN type has $\Phi 7\text{mm}$.

One touch Quick Change Iron Cartridge DX

Patented design

Thanks to our temperature sensor technology, we have created an iron cartridge that allows you to change only the tip and not the entire cartridge. Easy to change and there is no position variation after the replacement. Moreover, compared with our normal iron cartridge models, changing only the tip is around 50% cheaper.



J-CAT LYRA

Iron Tip Soldering Robot


Cell production type

Thanks to localized iron tip temperature control and approach function / angle retract function, the LYRA is equipped with a high level of functionality designed to improve the overall quality of soldering.



Localized iron tip temperature control


The iron tip temperature can be set for each point according to the work needs, e.g.: in heat capacity, solder through-hole filling rate, back fillet, etc.

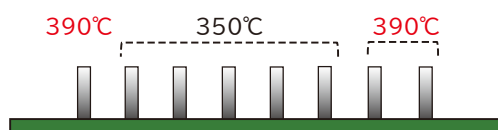


Approach function / angle retract function

You can move the iron tip closer to the coordinates of the soldering point at the set speed from any approach point. Similarly, after soldering, you can move the iron tip to any location safely.

It reduces the risk of damaging pins, which may occur due to unstable pin position. It also prevents interference with peripheral parts.



Move from any approach point to a teaching point at any speed



Soldering is possible without damaging the pin

Easy setting of the soldering conditions

You can easily set and change the soldering conditions with the included teaching pendant. Since each parameter is registered interactively, there is no need to learn complicated operations.

Soldering Condition 1	1/2
Soldering Type	Point Soldering
Temp. Setting Function	Disable
1st Amount	7mm
1st Feed Speed	15mm/s
1st Reverse Amount	3mm
1st Reverse Speed	50mm/s
Iron Down Motion	Enable
Approach Function	Disable
Pre-Heat Time	0.5esc
2nd Amount	7mm
2nd Feed Speed	10mm/s
2nd Reverse Amount	3mm

Supports dual iron feeder option

You can select the dual iron unit feeder specification as an option.

Simultaneous soldering at two locations shortens the tact time, and for workpieces with a large heat capacity, simultaneous heating with two irons solves this soldering dilemma which was not possible until now.

Type		J-CAT 320 LYRA	J-CAT 330 LYRA	J-CAT 340 LYRA
Operation Range	X axis	200mm	300mm	400mm
	Y axis	200mm	320mm	400mm
	Z axis	50mm	100mm	150mm
	R axis	±360°	±360°	±360°
Portable Weight (X table stage)		7kg	15kg	
Repeatability		X, Y, Z axes ±0.01mm		R axis ±0.008°
Resolution		X, Y, Z axes 0.01mm		R axis 0.08°
Teaching Method		Remote teaching (JOG) / Manual Data Input (MDI)		
Program Capacity		999 programs		
Memory Capacity		32,000 points		
External input / Output		input : 16 output : 16		
Soldering Condition		Point and Slide Total : 500 conditions		
Setting Temperature		0 ~ 500°C		
Solder Feeding Speed		1.0 ~ 50.0mm/sec		
Solder Feeding Amount Resolution		0.1mm		
Solder Wire Diameter	Using ZSB Feeder	Φ0.4 ~ 1.0mm (Option: Φ0.3mm)		
	Using Normal Roller	Φ0.3 ~ 1.0mm		
	Using Large Diameter Feeder	Φ1.2 ~ 2.0mm		
Heater Capacity		200W (Max.)		
Air Supply		0.4 ~ 0.5MPa (Dry & Clean Air)		
Power Source		AC94 ~ 260V (Single Phase)		
Power Consumption		800W		
Dimensions (W×D×H)		443×454×818mm	680×600×872mm	682×660×898mm
Weight		33kg	49kg	57kg

* Position repeatability is not a guarantee of absolute precision. With usage conditions, it may exceed the above value.

ARC-5000

Iron Unit Electric Arch (optional)

By combining the iron unit with a motor, the angle of the iron unit can be easily programmed as required.



The iron unit angle can be adjusted

By combining the iron unit with a motor, the iron unit can be changed to any angle. You can register the coordinates of the iron insertion angle for each point. Eliminates the risk of interference between the iron tip and peripheral parts, and it also makes the iron tip reach the point accurately. Even when using irons with different tip angles, such as in high-mix production, the angle can be changed to the taught angle for each registration program, so it can be used without problems in recreating the position.

Type	ARC-5000
Operation Range	-30°~+25°
Motor Specification	Stepping motor with the reduction gear (Harmonic drive®) (without encoder) Basic step angle: 0.018 degrees /pulse (Positioning accuracy ±0.006 degrees)
Maximum Speed	210deg/s
Maximum Acceleration	420deg/s²
Mountable Robot	J-CAT3□□ LYRA Soldering robot JS-3 LYRA II Soldering robot JC-3 LYRA II Soldering robot

Harmonic Drive is a registered trademark of Harmonic Drive Systems INC.

Iron Tip Soldering Robot

In-Line / Unit type

The OMEGA system has been designed exclusively for automated soldering. This soldering unit can be widely adapted for use in semi & fully automated systems, desktop robots, linear actuators and special purpose machines. The OMEGA is a new soldering unit compatible with MODBUS TCP/IP and Industry 4.0.



Model
OMEGA-LSP:
Controller and feeder separate type
OMEGA-LCO:
Controller and feeder combined type



Iron Unit
RSP



Solder feeder LFD

Iron unit RSP / RSL-R / RSL-FPR

It takes 8 seconds to replace the iron cartridge and it does not require position adjustment upon iron cartridge replacement.



RSP
for
point soldering



RSL-R
for
slide soldering



RSL-FPR
for
slide soldering

■ RSP/RSL-R/RSL-FPR

Type	RSP/RSL-R/RSL-FPR
Weight	0.8kg

Solder feeder LFD

It can control the feeding amount precisely by its pulse motor and the ZSB can be attached as an option.

■ LFD

Type	LFD
Solder Feed Motor	Pulse motor
Using	$\Phi 0.4 \sim 1.0\text{mm}$
ZSB Feeder	(Option: $\Phi 0.3\text{mm}$)
Solder Wire	Using
Diameter	Normal Feeder
	$\Phi 0.3 \sim 1.0\text{mm}$
	Using Large Diameter Feeder
	$\Phi 1.2 \sim 2.0\text{mm}$
Feed/Reverse Speed	0.1 ~ 50.0mm/sec
Weight	1.3kg

■ OMEGA controller

Type	OMEGA
Solder Condition	297 conditions
	Point:99 / Slide:99 / Special:99
Solder Step	9 Steps(Max.)
Setting Temperature	1~500°C
Heater Capacity	200W (Max.)
Power Source	AC85~264V (Single Phase)
Power Consumption	640W
Dimensions(W×D×H)	110×200×280mm
Weight	3.8kg

Simple operation on the Touch Panel

All operations can be done on the touch panel. The LCD shows a simple chart of the iron cartridge temperature on the touch panel, the current temperature change is clear at a glance.


Auto tuning function

Auto tuning function allows the user to easily set the optimal temperature control parameter.


Maintenance mode

It can check the operation of the heater or motor control part and the conditions of each sensor in maintenance mode.

Further, it has an I/O check function and can easily perform the communication check with the host communication side or confirmation when a malfunction occurs.

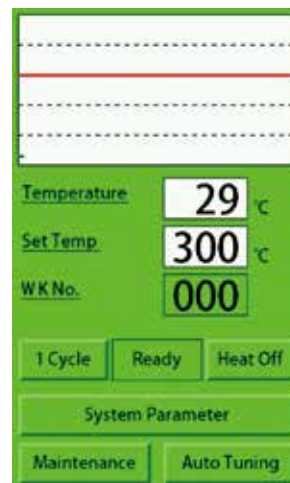

▲ Operation Screen (Example)

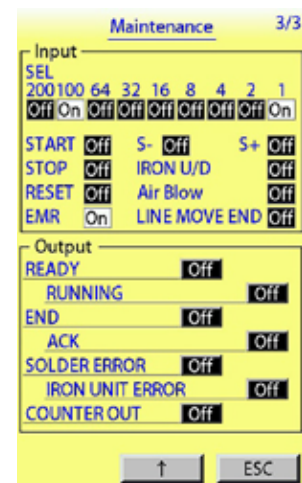

▲ Maintenance Screen (Example)

OMEGA Manager

Special PC Software for OMEGA

With the OMEGA manager, it is possible to monitor and check the controller condition. It receives and sends a variety of process parameters such as temperature data, error occurrence, soldering condition, system parameters, and more. Information such as temperature data can be exported and saved as a CSV file, allowing for simple verification of the soldering condition and cycle time.



▲ Monitoring Screen



▲ Error Warning Screen



▲ Solder Condition Acquisition Screen



▲ Log Setting Screen

SR-LYRA II

Iron Tip Soldering Robot

In-Line type

An in-line soldering device that combines a SCARA robot with the soldering unit "LYRA II". You can choose from two types of SCARA robots according to your application.



LYRA II & SR controller

Compact body and controller

The weight of the robot body is 19kg (in the case of SR400-LYRA II), which is lightweight and compact. The robot controller and LYRA II controller have also become compact, greatly increasing the degree of freedom for in-line design.

High-speed, high-reliability robot

By adopting a high-speed and highly reliable SCARA robot from FANUC, you can use the robot continuously.

Common features of the LYRA II controller

Localized iron tip temperature control

The iron tip temperature can be set for each point according to the work needs, e.g.: in heat capacity, solder through-hole filling rate, back fillet, etc.

Type	SR400-LYRA II	SR650-LYRA II
Operation Mode	Horizontal Articulated Robot	
Controlled Axes	4-axes (J1、J2、J3、J4)	
Motion Range	400mm	650mm
J1 axis	$\pm 142^\circ$ (720°/s) 2.48rad (12.57rad/s)	$\pm 148^\circ$ (440°/s) 2.58rad (7.68rad/s)
J2 axis	$\pm 145^\circ$ (780°/s) ± 2.53 rad (13.61rad/s)	$\pm 150^\circ$ (700°/s) ± 2.62 rad (12.22rad/s)
J3 axis stroke	200mm (1,800mm/s)	210mm (2,000mm/s)
J4 axis	$\pm 360^\circ$ (3,000°/s) 6.28rad (52.36rad/s)	$\pm 360^\circ$ (2,500°/s) 6.28rad (43.63rad/s)
Wrist Part Portable Weight	3kg	6kg
J1 + J2 axis	± 0.01 mm	± 0.01 mm
J3 axis	± 0.01 mm	± 0.01 mm
J4 axis	$\pm 0.004^\circ$	$\pm 0.004^\circ$
Weight of Robot (The controller unit is not included)	19kg	30kg
Solder Condition	Point and Slide Total : 500 conditions	
Setting Temperature	0 ~ 500°C	
Solder Feeding Speed	1.0 ~ 50.0mm/sec	
Solder Feeding Amount Resolution	0.1mm	
Solder Wire Diameter	$\Phi 0.4 \sim 1.0$ mm (Option $\Phi 0.3$ mm)	
Using ZSB Feeder	$\Phi 0.3 \sim 1.0$ mm	
Using Normal Roller	$\Phi 1.2 \sim 2.0$ mm	
Using Large Diameter Feeder	200W(Max.)	
Heater Capacity	0.4 ~ 0.5MPa (Dry & Clean Air)	
Air Supply	AC200 ~ 240V (Single Phase)	
Power Source	2,000W	
Power Consumption		

* Position repeatability is not a guarantee of absolute precision. With usage conditions, it may exceed the above value.

Iron tip Soldering Robot

In-Line type



LYRA II & JS-3 controller

Comprehensive & straightforward teaching

Uses interactive teaching, which has been well received even on the desktop type. PC software can now be operated intuitively. Data management becomes even easier when there are many soldering points or programs.

The iron tip angle can be adjusted (optional)

By combining the iron unit with a motor, the iron unit can be changed to any angle.

The coordinates of the iron insertion angle can be registered for each point.

This eliminates the risk of interference between the iron tip and peripheral parts, and allows the iron tip to reach the point with high accuracy. (Refer to P10: ARC-5000)

Common features of LYRA II controller

Approach function / angle retract function

You can move the iron tip closer to the coordinates of the soldering point at the set speed from any approach point. Similarly, after soldering, you can move the iron tip to any safe location.

It reduces the risk of damaging pins, which may occur due to unstable pin position. It also prevents interference with peripheral parts.

Type		JS-330LYRA II	JS-340LYRA II	JS-350LYRA II
Arm Length	Maximum(J1+J2)	350mm	450mm	550mm
	J1 axis	125mm	225mm	325mm
	J2 axis		225mm	
Operation Range	J1 axis		340(±170)°	
	J2 axis		290(±145)°	
	J3 axis		200mm	
	J4 axis		720(±360)°	
Maximum Speed	Combined(J1+J2+J4)	6,900mm/sec	7,600mm/sec	8,300mm/sec
	J3 axis		2,080mm/sec	
	J4 axis		2,500°/sec	
Portable Weight		Maximum 6kg (Rating 3kg)		
Repeatability*	Combined(J1+J2)	±0.010mm		±0.012mm
Weight of Robot		36kg		37kg
Control Method		PTP (Point to Point) / CP (Continuous Path)		
Interpolation		3-dimensional linear and arc interpolation		
Teaching Method		Remote Teaching (JOG), Manual Data Input (MDI), Direct Teaching		
Teaching Pattern		Direct teaching using optional Teaching Pendant II		
		Offline teaching using optional JR C-Points II PC Software		
Program Capacity		999 programs		
Memory Capacity		32,000 point		
Simple PLC Function		1,000 Steps		
External Input / Output		LAN・I/O-SYS (15 Inputs / 14 Outputs)・I/O-S・COM1・I/O-MT (Option)・ Fieldbus (CC-Link・DeviceNet・PROFIBUS・PROFINET・CANopen・Ethernet/IP Option)		
Power Source		AC200 ~ 240V(Single Phase)		
Power Consumption		1,850W		

* Position repeatability is not a guarantee of absolute precision. With usage conditions, it may exceed the above value.

L-CAT EVO-II

Iron Tip Soldering Robot

In-Line/ Cell production type

The newest version of the EVO series has the most exclusive features for soldering.



Gantry type soldering robot

All 4 axes (X, Y, Z & R) are suspended from the gantry which allows for simple fixture design and easy integration into a conveyorized system.

Fixture size and weight as well as cable/wire harness lengths are not an issue as the fixture remains stationary on the robot base table.


Programming freedom & flexibility

L-CAT EVO-II has a very flexible solder sequence that can be customized to meet the needs of your specific application.

Soldering parameters can be arranged in a sequence that provides a solution for each particular soldering challenge.

In-line/ Cell Production

An example of the L-CAT EVO-II being used with a conveyor.

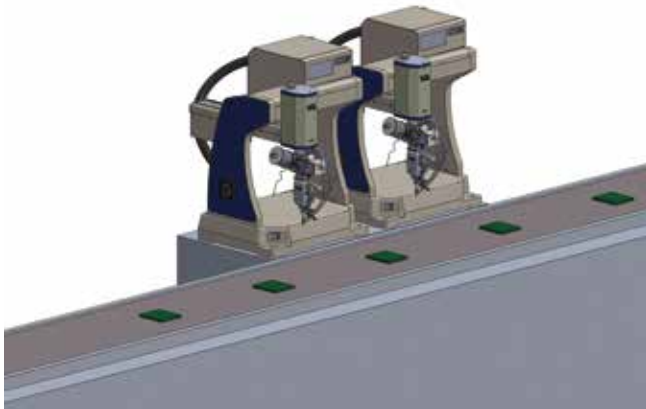


Standard nitrogen gas generator

Increases the solder wettability, and provides better results and minimizes solder defects.

Iron tip temperature can be set individually for each point

High-quality soldering of components with different heat capacities, reliable filling of through-hole, and perfect back fillets can be achieved.

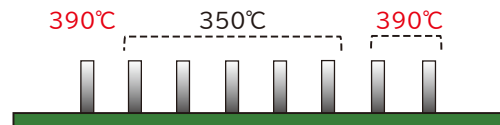

Iron unit & feeder, all on the same axis

Due to the iron unit and feeder being on the same axis, when rotating it, the feeder tube does not twist or loosen.

Type		L-CAT EVO-II 4330	L-CAT EVO-II 4430	L-CAT EVO-II 4540
Operation Range	X axis	300mm	400mm	500mm
	Y axis	300mm	300mm	400mm
	Z axis	60mm	60mm	60mm
	R axis	340°	340°	340°
Repeatability		X, Y, Z axes $\pm 0.02\text{mm}$		
Resolution		X, Y, Z axes 0.01mm		
Teaching Method		Remote teaching (JOG) / Manual Data Input (MDI)		
Program Capacity		100 programs		
Memory Capacity		100,000 points		
External Input / Output	SYS - I/O	IN:16 OUT:10		
	Free I/O	IN:16 OUT:16		
Soldering Condition		198 conditions		
Setting Temperature		0 ~ 500°C		
Solder Feeding Speed		1.0 ~ 50.0mm/sec		
Solder Feeding Amount Resolution		0.1mm		
Solder Wire Diameter	Using ZSB Feeder	$\Phi 0.4 \sim 1.0\text{mm}$ (Option: $\Phi 0.3\text{mm}$)		
	Using Normal Roller	$\Phi 0.3 \sim 1.0\text{mm}$		
	Using Large Diameter Feeder	$\Phi 1.2 \sim 2.0\text{mm}$		
Heater Capacity		200W (Max.)		
Air Supply		0.4 ~ 0.5MPa (Dry & Clean Air)		
Power Source		AC94 ~ 260V		
Power Consumption		330W		
Dimensions (W×D×H)		520×995×714mm	620×995×714mm	720×1,100×714mm
Weight		50kg	52kg	55kg

* Position repeatability is not a guarantee of absolute precision. With usage conditions, it may exceed the above value.

J-CAT CMS

Metal Sleeve Soldering Robot


Cell production type

The J-CAT CMS is the latest sleeve-type soldering robot that adopts a metal sleeve. By adopting a cartridge heater for the lightweight and compact head, it is possible to insert the sleeve into narrow spaces.


Patented




Sleeve Soldering Mechanism




The CMS head moves to a specified position.



After pre-heating the pad or land by the sleeve, the solder wire is then cut and dropped into the solder joint area.



The solder wire is heated up and melts inside the sleeve.



The solder melts smoothly because the flux fumes are exhausted through the vent holes on the sleeve.



The entire amount of solder is fed, completely melts and is delivered to the solder joint to ensure consistent solder results.

No spattering or solder balls

When the solder is supplied to the work area or when the solder melts, the sleeve creates a closed space, preventing solder balls and flux spatter.

Barrel fill and perfect back fillet

Utilizing flux that melts at a lower temperature compared to conventional solder wire, it flows along the pins before the solder melts. So, it makes through-hole and back fillet soldering easy.

Ensures a constant amount of solder

It cuts the solder wire to the set amount, then supplies it to the work point, and then melts the solder.


As the solder does not get wet within the sleeve, all the cut solder is supplied to the point to ensure the consistency in the amount of solder.

No position variation due to tip erosion

With iron tip soldering, position variation occurs when using a new iron tip compared to using an old one which has been worn down through use.


Since the sleeve does not get wet with solder, the sleeve tip does not incur erosion.

CMS Head Structure

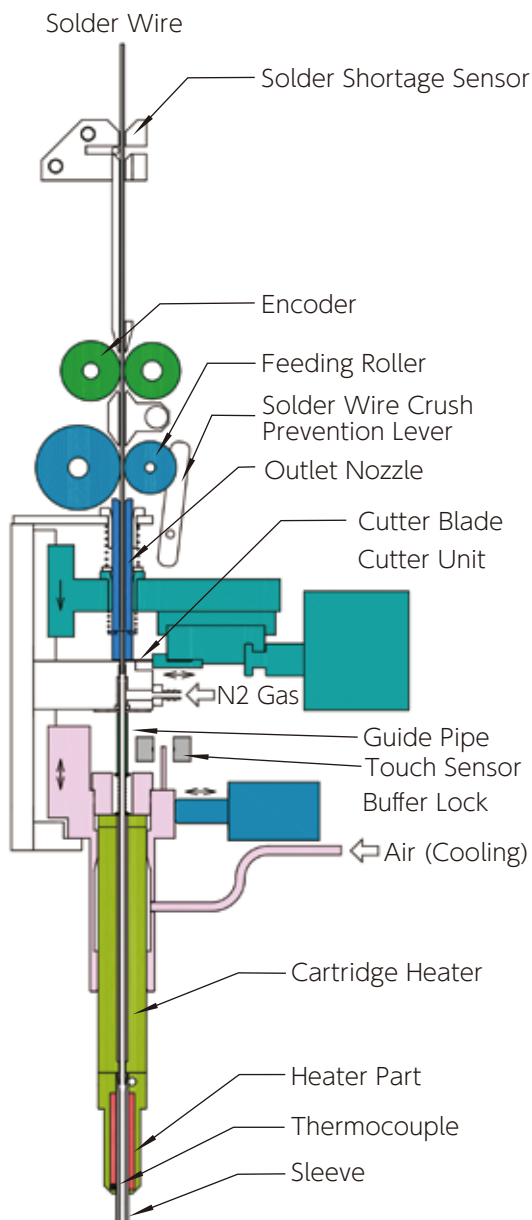

Metal sleeve

Because of the highly conductive metal used in the unique design, soldering temperature is minimized and the recovery time is much faster.

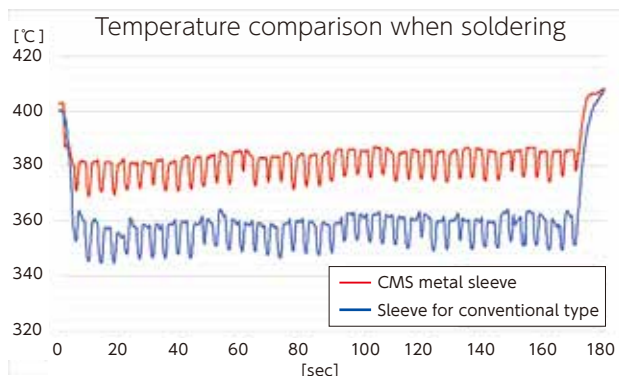

Nitrogen gas generator APN-01 (Standard)

This is an N2 dispenser designed specifically for use with Apollo Seiko N2 tips.

The gas passes through from the inside of a cartridge heater to the inside of the sleeve and is discharged from the tip of the sleeve. It can solder in a nitrogen gas atmosphere.



Touch sensor / Buffer lock

When the sleeve tip touches the work, it stops to move in the Z direction. The buffer lock function registers the Z height, and it fixes the height of the sleeve tip.

With the buffer lock set as a reference height, Z is always soldered at a constant height.

Cartridge heater

The shape of the cartridge heater is slim, and it is designed to be used in narrow spaces such as high-density PCB layouts. It has higher power and a quick response.



Position correction unit F2R-3000 (Standard – 3-axis only)

This unit corrects positional displacement that can occur when exchanging the cartridge heater and sleeve. It compares the programmed position data with the actual location of the cartridge and sleeve after replacement.



Drill cleaner DRC-1400 (Optional)

The rotating drill bit removes any dross from inside the sleeve.



Type	J-CAT 330 CMS	J-CAT 340 CMS
Operation Range	X axis	300mm
	Y axis	320mm
	Z axis	100mm
Portable Weight (X table stage) *1	15kg	
Repeatability*2	X,Y,Z ±0.007mm	
Teaching Method	Remote Teaching (JOG) / Manual Data Input (MDI)	
Program Capacity	999 programs	
Memory Capacity	32,000 points	
External input / Output	IN: 16 OUT: 16	
Soldering Condition	500 conditions	
Setting Temperature	0~500°C (1°C increments)	
Solder Feeding Amount	2~10mm (0.1mm increments)	
Solder Feeding Speed	10,20,30,40,50mm/sec (selectable)	
Usable Solder Diameter	Φ0.4 ~ 0.8mm	
Heater Capacity	200W	
Supply Air	0.4~0.5MPa (Dry & Clean Air)	
Power Source	AC94~260V (Single phase)	
Power Consumption	650W (Max.)	
Dimensions (W×D×H)	682×536×809mm	674×670×857mm
Weight	45kg	52kg

*1 It includes the jig base(1.8kg), F2R-3000(0.7kg) and DRC-1400(0.8kg).

*2 Position repeatability is not a guarantee of absolute precision. With usage conditions, it may exceed the above value.

CMS-1AU

Sleeve Soldering Robot

In-Line type

Single axis CMS robot for dedicated machines and in-line use.



1-axis robot equipped with only Z-axis

An in-line metal sleeve soldering robot that combines a CMS head and programmable Z axis. This allows for simple integration with any robot.

Type	CMS-1AU
Operation range (Z axis)	100mm
Portable Weight	5kg
Repeatability	±0.02mm
Soldering Condition	15 conditions
Position Movement Program	16 positions
Setting Temperature	0~500°C (1°C increments)
Solder Feeding Amount	2~1.0mm (0.1mm increments)
Solder Feeding Speed	10,20,30,40,50mm/sec (selectable)
Usable Solder Diameter	Φ0.4~0.8mm
Heater Capacity	200W (Max.)
Air Supply	0.5MPa
Power Source	AC100~240V (Single phase)
Power Consumption	680W (Max.)

*These specifications may be changed for improvement without prior notice.

STAR GATE-E

Laser Soldering Unit

In-Line/ Cell production type

Controls the laser power according to the soldering temperature.



Coaxial laser head



Laser controller



Attached with a robot
(J-CAT330 STAR GATE-E)

In conventional laser soldering, all the laser power is used as a base to set the required temperature. However, the type of material and components around the soldering item may cause a variation in the temperature. Thus, causing unexpected results such as overheating or insufficient heating of the solder and consequently, damaging the product.


Thanks to the development of the STAR GATE coaxial laser head, the new generation of laser soldering, this deficiency has been overcome.

Set the laser power according to the soldering temperature

With STAR GATE it is possible to control the soldering process with the actual temperature.


The user does not need to consider the power of the laser is automatically set according to the temperature.

【 Temperature Setting Waveform 】

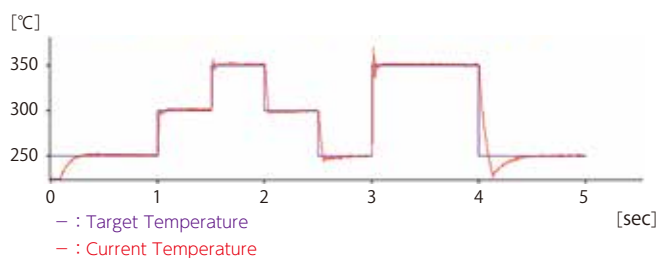

The laser light beam and the infrared pyrometer radiation is delivered from a coaxial laser head

We have coupled the infrared pyrometer and laser beam into the coaxial laser head, which provides real-time control and precision of the soldering process temperature. (sampling cycle 0.0001sec)

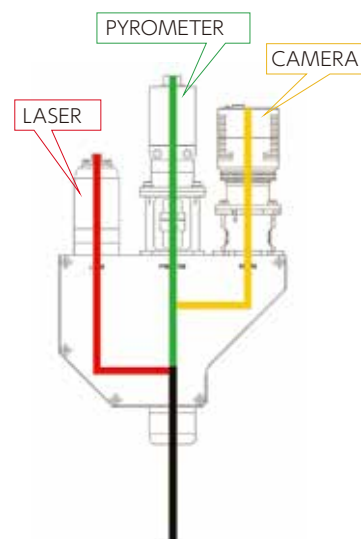

【 Inner drawing of the coaxial head 】


Two types of wave are available; infrared or blue wave

Options are an 80W laser with an infrared wavelength of 915nm, or 50W blue laser with a wavelength of 450nm.

Because the absorption rate of the blue laser in shiny metals such as gold and bronze, it requires less power to solder than the infrared laser.

The light reflection is also lower, which helps avoid damaging the surrounding components or solder mask.

【 Absorption level of some metals 】

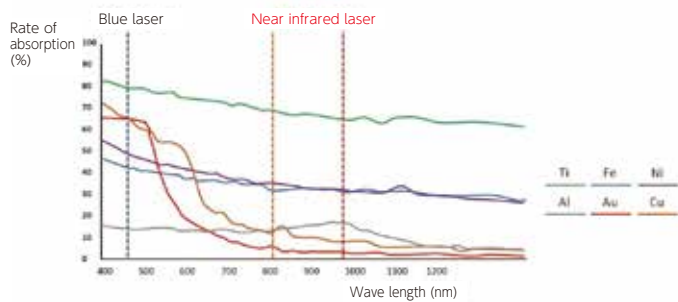


A minimum fiber size of 105μm

Thanks to the use of 105μm size fiber, it is possible to generate a beam from a diameter of $\Phi 18\mu\text{m}$.

*The minimum size of laser beam which can be controlled with temperature is $\Phi 250\mu\text{m}$ or more.

Visualization of the Soldering temperature & laser power

Displays the control status through PC software.

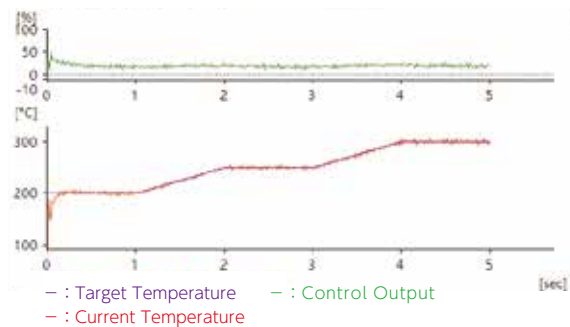

MLU

Laser Soldering Unit

In-Line/ Cell production type

A low-priced, entry-level, conventional model laser solder machine. This system is controlled by laser power instead of temperature. It is composed of a laser controller, laser oscillator, and laser head.

Small size laser head

Due to its small size of 104 mm, it is perfect for mounting on In-Line machines. Furthermore, the laser beam and the camera are configured in a coaxial head, capable of microscopic adjustments.



Inexpensive introduction cost

In cases where it is not necessary to control the laser power by temperature, it is more cost effective than STAR GATE.



Twin Beam Function

This special optical system splits one laser beam into two. The split beam easily mounts to the conventional laser head.




The electrodes on the right and left sides are heated by the laser at the same time. It prevents the flotation, inclination and the Manhattan phenomenon of the tip part and allows stable soldering. It can solder a pair of soldering points at the same time which shortens the cycle time.



Combination Variety

This system can easily meet virtually any user requirement & process flow.

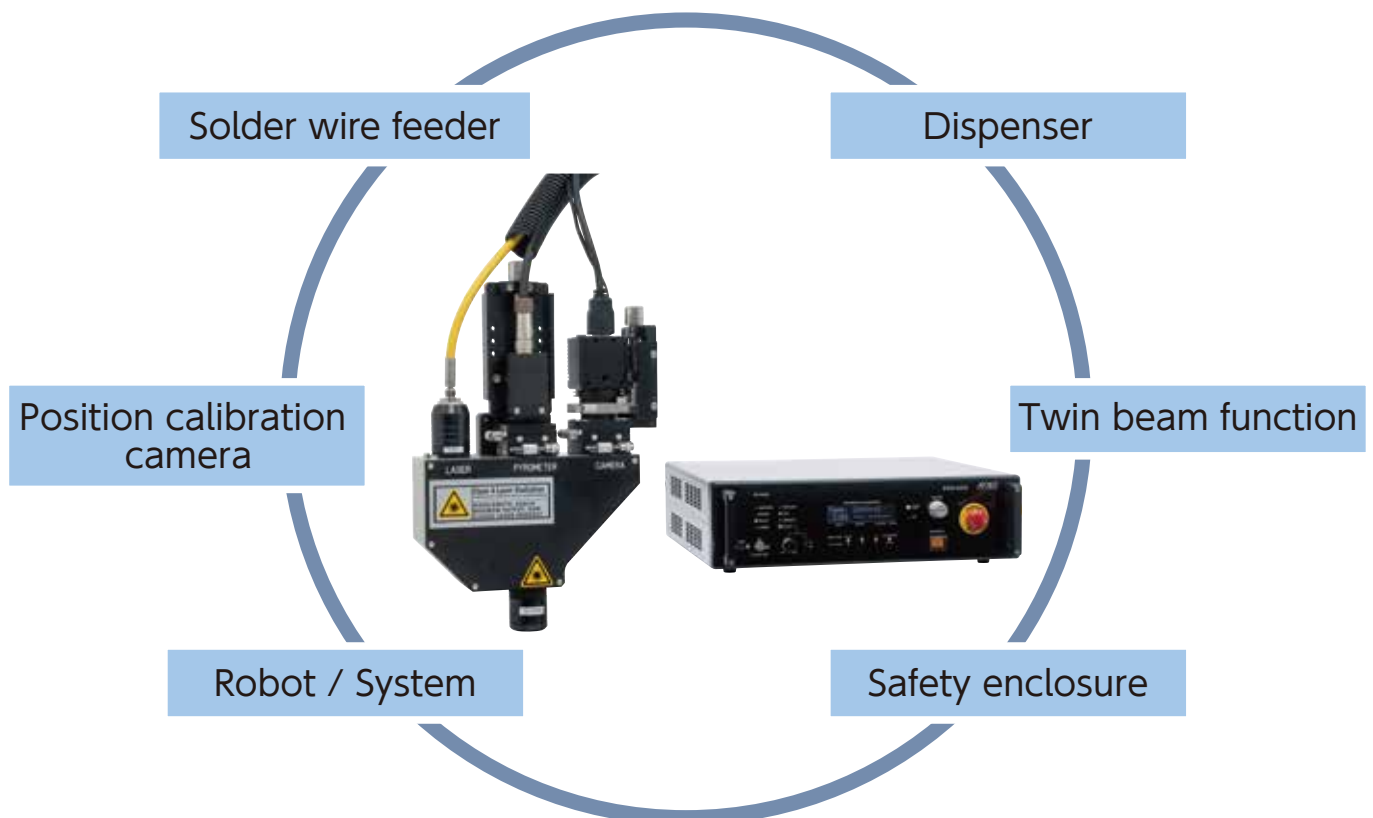

*Please contact us for available configurations.

■ MLU / STAR GATE-E

Type		MLU-808FS	MLU-980FS	STAR GATE	STAR GATE BLUE
Material		Semiconductor Laser			
Oscillation		Continuous Wave			
Wavelength		808nm	980nm	915±15nm	450±15nm
LD Output		50 or 100W		80W	50W
Fiber Core Diameter		200 or 400μm		105 or 200μm	
Guide Beam		650nm (±10nm)			520nm (±15nm)
Halation Prevention		Available			
LD Cooling System		Electric Cooling			
Coaxial Camera Monitoring Function		Available			
Coaxial Pyrometer Function		Not Available		Available	
Fiber Length		3M or 5M		3M or 5M	
Focused Beam Diameter		φ67μm~φ4000μm φ133μm~φ8000μm		φ18μm~φ2100μm φ33μm~φ4000μm	
Temperature Control	Upper Limit Type	Not Available		Not Available	
	Perfect Temperature Waveform Type	Not Available		Available (Internal Integrated Type)	
Pyrometer	Pyrometer Position	—		Arranged coaxially with the laser beam	
	Measurement Size	—		φ250μm	
	Measurement Temperature Range	—		140°C~700°C	
	Response Speed	—		0.0001sec	
Registered Waveform Capacity		16		32	
External Interface		RS232C or LAN + GPIO		RS232C + GPIO	
Dimensions (W×D×H)		【 Laser Head 】 104×192×63mm (Except projection)		【 Perfect Coaxial Laser Head 】 185×58×279.5~43.75mm (Except projection)	
		【 Laser Oscillation Unit 】 270×260×230mm (50W) 430×360×242mm (100W)		【 Laser Oscillation Controller 】 ●915nm 80W Type 448mm×504mm×132mm ●450nm 50W Type 448mm×584mm×175mm	
		【 Laser Controller 】 430×350×149mm (50W) 430×400×190mm (100W)			
Weight		【 Laser Head 】 Approx. 1kg		【 Perfect Coaxial Laser Head 】 Approx. 2.1kg	
		【 Laser Oscillation Unit 】 Approx. 6.5kg(50W) Approx. 21kg(100W)		【 Laser Oscillation Controller 】 ●915nm 80W Type Approx. 14kg ●450nm 50W Type Approx. 25kg	
		【 Laser Controller 】 Approx. 16kg(50W) Approx. 17.5kg(100W)			
Power		AC100V (Single Phase) 50~60Hz AC200V (Single Phase) 50~60Hz AC220V (Single Phase) 50~60Hz *Select one type		●915nm 80W Type AC100-120V / AC200-240V 50/60Hz ●450nm 50W Type AC100-120V/AC200-240V 50/60Hz (Switching System)	
Power Consumption		50W: 1.1kVA or less 100W: 1.4kVA or less		1.5kVA or less	

*These specifications may be changed for improvement without prior notice.

Type		J-CAT 330 STAR GATE-E	J-CAT 340 STAR GATE-E
Operation Range	X axis	300mm	400mm
	Y axis	320mm	400mm
	Z axis	100mm	150mm
Portable Weight ※1		15kg	
Program Capacity		999 programs	
Memory Capacity		32,000 points	
External Input / Output		IN: 16 OUT: 16	
Soldering Condition		500 conditions	
Power Source		AC200~240V (Single Phase)	
Program Consumption		1,850W (Maximum)	
Dimensions (W×D×H) ※2		682×613×925mm	674×673×931mm
Weight ※3		55kg	62kg

*These specifications may be changed for improvement without prior notice.

*1 It includes the jig plate. (J-CAT330: 1.6kg, J-CAT340: 1.7kg)

*2 This value differs according to the head position and output lens. (Except projection)

*3 It is the weight without the STAR GATE controller and monitor when it is full option. The weight of the STAR GATE controller differs depending on the model type.

J-CAT WAVE

IH Soldering Robot

Cell Production Type Robot


The IH (Induction Heating) soldering robot “J-CAT WAVE” is a non-contact soldering system that provides localized self-heating via the world’s first magnetic concentrating technology. The IH heating system can quickly solder an application having a large heat sink.



Non-contact & Local Heating

The J-CAT WAVE provides local self-heating that cannot be achieved with conventional resistance equipment.

The heating energy is increased about 1.5 times by the self-heating of the terminal, application, and solder compared to a conventional heat transfer method.

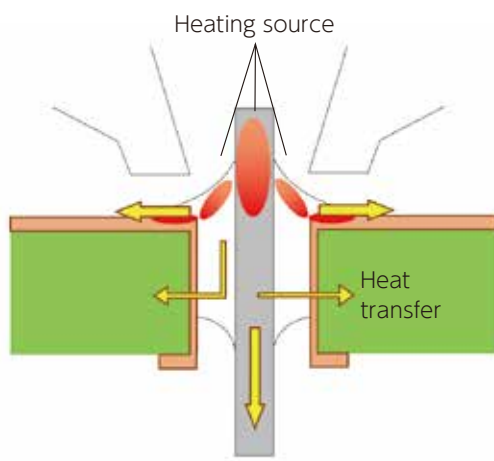


Freely Controllable Heating

“Pre-heating”, “heating” and “after heating” (post solder feeding) can be programmed individually for each soldering point.

The controller can change the heating power and achieves optimal soldering results.

It can also be used to reflow solder paste as well as solder wire.

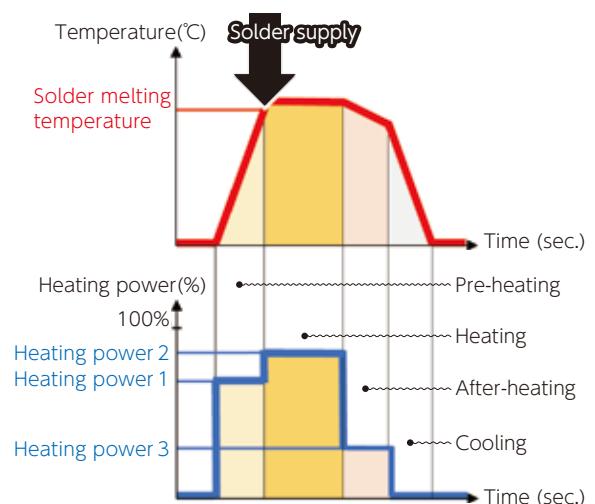

Low Running Cost

Non-contact soldering reduces the running costs of consumable parts such as iron tips.

There is no need to replace or adjust the consumable parts as often. Therefore, it is possible to run the equipment for extended periods without stopping for a consumable change.

Also, cleaning during the operation is not necessary. The JCAT WAVE also reduces any wasted amount of solder as well as CO₂ which is much better for the environment.



Safer Soldering Environment

Due to induction heating technology, the maximum temperature of the tool is approximately 100 ° Celsius.

The tool's temperature is not always high, and the application's temperature decreases quickly after soldering, thus safer for the operators and sensitive electronics.

It does not require a safety device, such as when using a laser beam device.

This robot conforms to **ICNIRP** guidelines that restrict electromagnetic wave exposure to be safely used by the operator.

Simple Control

You can easily set and change the soldering conditions with the included teaching pendant.

Since each soldering parameter & function are pre-defined there is no need to learn complicated operations or programming sequences.

Type		J-CAT 330 WAVE	J-CAT 340 WAVE
Operation Range	X axis	300mm	400mm
	Y axis	320mm	400mm
	Z axis	100mm	150mm
	XR(application rotate) axis	±360°	±360°
Portable Weight (X stage)		6kg	
Repeatability		X, Y, Z axis ±0.07mm	
Teaching Method		Remote Teaching (JOG) / Manual Data Input (MDI)	
Program Capacity		999 programs	
Memory Capacity		32,000 points	
External Input /Output		IN: 16 OUT: 16	
Soldering Condition		500 conditions	
Solder Feeding Speed		1.0~50mm/s	
Solder Feeding Amount Resolution		0.1mm	
Solder Wire	Using Normal Roller	Φ0.3~1.0mm	
Diameter	Using Large Diameter Feeder	Φ1.2~2.0mm	
Power Source		AC94~260V (Single phase)	
Heater Capacity		880W (Maximum)	
Dimensions (W×D×H)	Robot	682×587×914mm	660×670×944mm
	Control Box	432×500×199mm	
	High Frequency Power Supply Unit	291×288×139mm	
Weight	Robot	51kg	60kg
	Control Box	13kg	
	High Frequency Power Supply Unit	8kg	

*Position repeatability is not a guarantee of absolute precision. With usage conditions, it may exceed the above value.

*J-CAT WAVE has been developed under an agreement between Apollo Seiko Ltd and S-FINX Technologies CO., LTD.

*These specifications may be changed for improvement without prior notice.

JC-3 series

3 / 4-axis Cartesian Robot

In-Line / Cell production type

Introducing the most suitable soldering robot for in-line production. The combination of the Apollo Seiko soldering control unit and a Janome Cartesian robot.



3-axis type



4-axis type



Adaptable to the soldering process

Iron tip and laser soldering process; you can select the most suitable process and integrate it with this Cartesian robot.

Also, this system uses the same available options as the J-CAT series desktop robots.

A simple control

This system utilizes the same Teaching Pendant as on the J-CAT series robot.

Many stroke size options


You can select the most suitable stroke size and the number of axes for your application requirement.

In-Line / Cell production

It can be integrated with a conveyor line, dual shuttle or a free-standing fixture as a option. You are free to choose the best method for your needs.

Robot Combination Example

JC-3-4A LYRA In-line type example

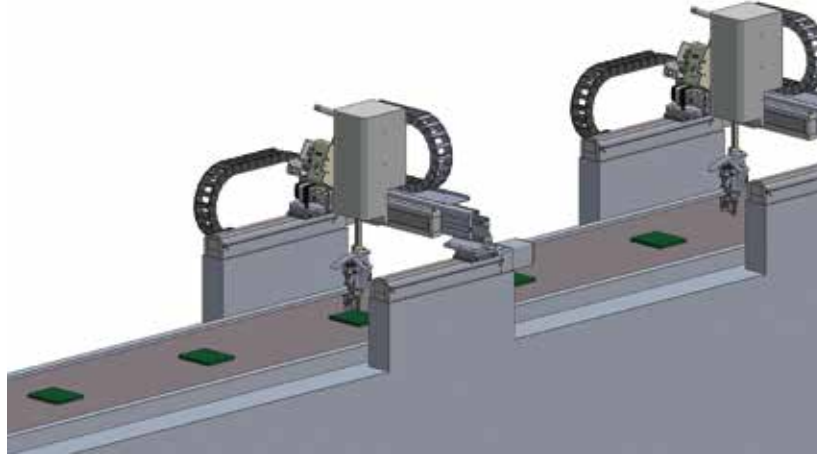

Type		JC-3-3A	JC-3-4A
Soldering Method		Laser	Iron
Number of Axes		3 Axes Synchronous Control	4 Axes Synchronous Control
Stroke	X axis (mm)	300/400/500/600mm	
	Y axis (mm)	300/400/500mm	
	Z axis (mm)	50/100/150/200mm	100/150mm
	R axis (deg)	—	±360°
Maximum Portable Weight (kg)		8kg	3kg
Maximum Speed 〈 PTP Movement *1 〉	X axis(mm/s)	300/400mm: 700mm/sec 500/600mm: 800mm/sec	
	Y axis(mm/s)	800mm/sec	800mm/sec
	Z axis(mm/s)	400mm/sec	400mm/sec
	R axis(deg/s)	—	900°/sec
Repeatability (mm) *2	X axis(mm/s)	±0.02mm	
	Y axis(mm/s)	±0.02mm	
	Z axis(mm/s)	±0.02mm	±0.01mm
	R axis(deg/s)	—	±0.008°
Teaching Method		Remote Teaching (JOG) / Manual Data Input (MDI)	
External Input / Output		I/O-SYS: 16 Inputs/ 16 Outputs I/O-1: 8 Inputs / 8 Outputs	
		I/O-MT (Optional): for auxiliary axes (pulse string input type*8) control, control up to 2 axes	
		Fieldbus (Optional): Choose CC-Link / DeviceNet / PROFIBUS	
		COM Port (RS232C): COM1, COM2, COM3 (for external device control)	
		EMG OUT: For external safety circuit connection MEMORY: For USB memory connection	
		LAN: For PC connection via the Ethernet SWITCHBOX (Optional): Dedicated switchbox connector	
Power Source		AC90~240V (single phase) 50/60Hz + external DC48V (depending upon facility supply)	

* 1 Maximum speed may be unreachable depending upon the tool attachment setup.

* 2 Repeatability measured at a constant temperature, so absolute precision is not guaranteed.

AF Series

Selective Flow Soldering System

In-Line / Cell production type

The new cost-effective AF Series has the same core functions as our F-CAT Series. You can select between In-Line type and All-In-One type. In each model an auto nozzle cleaner, flow height sensor & temperature control function as well as XY camera position sensing is included. These new selective flow systems include the option of QR / Barcode reading & MES data storage.

AF iN4050 Z3 In-Line type

A 3 step solder system including pre-flux, pre-heater and solder section. The modular type system allows for customization and expansion of your equipment.



Model		AF iN4050 Z3	AF iN2535 Z3
Power Consumption		25kW	
Power Source		AC200~240V 50/60Hz 3Phase	
N2 Requirement		0.2~0.4MPa 99.99% 20±5ℓ/min	
Working Area (X×Y)		500×400mm	350×250mm
Dimensions (W×D×H)	Flux & Preheater	2000×1640×1527mm	1850×1490×1527mm
	Solder	1300×1640×1527mm	1150×1490×1527mm

AF iN4050A In-Line / All-in-one type



This is an all-in-one selective flow system for production in a high-mix, low-volume environment. It is possible to select from the combination of conveyor type and the application board size (robot stroke).

Model	AF iN4050A	AF iN2535A
Power Consumption	11kW	
Power Source	AC200~240V 50/60Hz 3Phase	
N2 Requirement	0.2 ~ 0.4MPa 99.99% 20±5ℓ/min	
Working Area (X×Y)	500×400mm	350×250mm
Dimensions (W×D×H)	1300×1640×1527mm	1150×1490×1527mm

AF 4050A Off-Line, All-in-one Selective Flow System

This model is an all-in-one machine for off-line production. It is equipped with all the automatic nozzle cleaning, automatic solder feeder, and position calibration camera, etc.




Model	AF 4050A	AF 2535A
Power Consumption	11kW	
Power Source	AC200~240V 50/60Hz 3Phase	
N2 Requirement	0.2 ~ 0.4MPa	99.99% 20±5ℓ/min
Working Area (X×Y)	500×400mm	350×250mm
Dimensions (W×D×H)	1200×1930×1527mm	1050×1780×1527mm

AF series Features

Solder Bath

Utilizing a small tank of 6.5kg reduces the machine starting time and suppresses the dross formation. The impeller rotation is connected directly to the motor. As a result, this system prevents the belt and chain traction from stretching or skidding and provides stable rotation. Also, the automatic nozzle cleaner and automatic flow height sensor function provides for controlled and smooth solder flow.

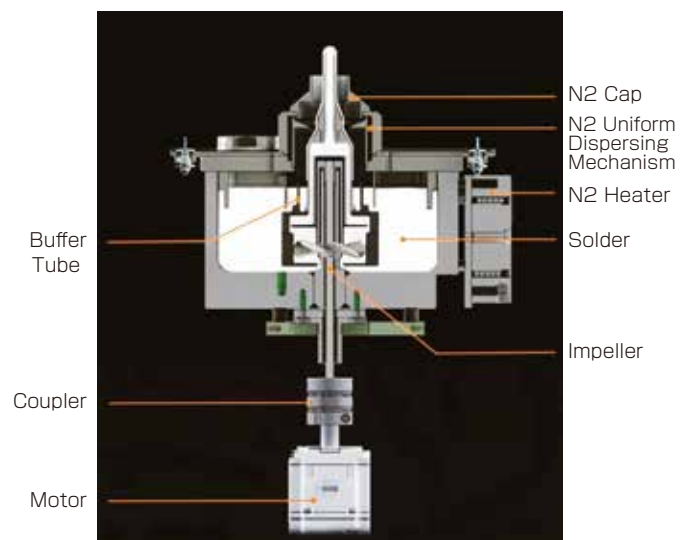


Nozzle Type

You can select the nozzle type that meets your application needs.

Standard Type (Circle)




Customization Type (Example)

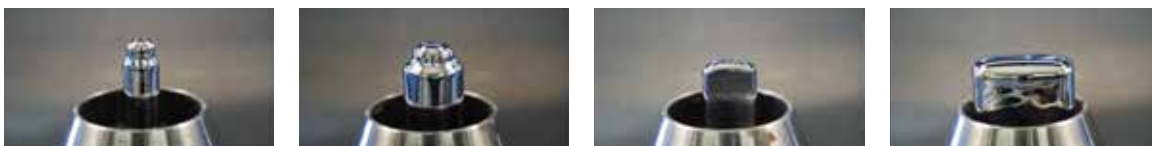

Software and Monitor Screen

The monitor screen displays all the necessary information needed to program and run the machine. The teaching can be performed via a PC.

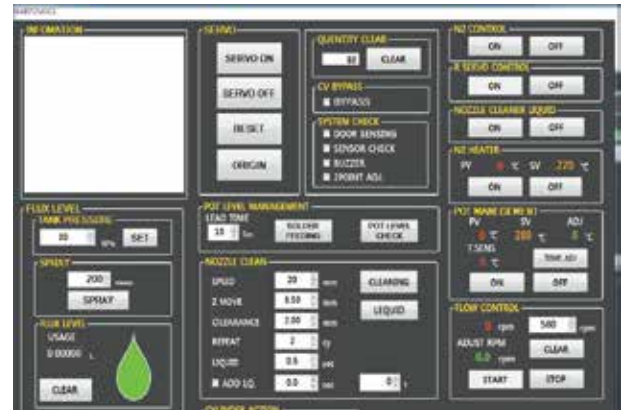

Micro Jet Flux

5 dot size levels are available. The application cycle range is from 10~100ms allowing the selection of the most suitable flux quantity for each workpiece.

Standard Nozzle



Option Nozzle




Remote Control Function

Capability to be controlled remotely by connecting to the internet. The remote control and internet connection allows the selective soldering system to set up, teach, and inform if some trouble occurs.



Utility – Machine with various convenience functions

Automatic Nozzle Cleaner

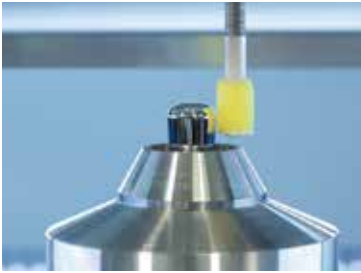

The nozzles can now be cleaned automatically which improves safety and ease of maintenance.

Automatic Solder Feeder



Solder wire is used instead of bar solder and is automatically fed into the solder pot which is easier and safer.

Camera Scan Teaching



The AF series application is directly scanned so teaching can be performed.

Flow Height Control



The laser sensor observes and calibrates any flow height changes that occur from the solder surface height in the bath, and any variation by the rotation of the impeller.

Position Calibration Camera



It detects and calibrates any application shift before pre-fluxing and soldering.

N2 Heater



The unit heats the nitrogen coming into the solder pot and controls the nitrogen temperature.

AF Series Function List

Standard Function

- Monitoring Camera
- Solder Feeder
- Dot Fluxer
- Camera Scan Teaching
- Nozzle Cleaner
- Position Calibration Camera
- Flow Height Control
- Flow Temperature Control
- Pre- Heating

Common Function

- Nozzle Size $\Phi 4 \sim 20\text{mm}$
- Solder Bath 6.5kg

Option

- Flux Detection Sensor
- N2 Requirement
- Flow Height Control (Vision camera type)
- ☐ QR / Barcode Reader
- ☐ MES Data Storage
- ☐ Loader / Unloader / Conveyor

Note: It needs the specification examinations when using these options (☐).

AF 3040DTFL

Desktop Fluxer

Cell production type

Our latest addition to our product line, the desktop-type fluxer, is ideal for small to medium-batch, multi-variety production.

You can expand each fluxing unit to fit up to three solder units. It comes with a customizable, space-saving design that is accessible at a budget-friendly price.



A wide range of options

- A3 size scanner
- Scanner input software
- Computer
- PCB stock sensor
- Three-light signal tower
- Dust collector
- Safety cover
- Area sensor-type safety cover
- Aluminum frame stand

Model Number		AF 3040DTFL	AF 3040DTSL
Model Number	Size	50×50 ~ 300×400mm	50×50 ~ 300×400mm
	Thickness	0.8 ~ 2.0mm	0.8 ~ 2.0mm
	Component height on board *1	50mm or less above the surface of the board.	
		25mm or less below the surface of the board.	
Program capacity		200 programs	
Points capacity		250 programs	
Power source		Single Phase AC200V +10% 50/60Hz	
		5 A	20A
Air pressure		0.4 ~ 0.5 MPa	-
Nitrogen		-	0.2 ~ 0.4MPa 20L/min
Power Consumption		500W	2,500W
Dimensions *2 (W×D×H)		730×1085×405mm	590×1085×516mm
Weight		70kg	130kg※3
Coating method	Spray Method	Low-pressure dual-fluid nozzle	-
Compatible nozzles size		-	φ2.5 ~ 20

*1 Based on the bottom surface of the PCB.

*2 Excluding protrusions and covers.

*3 Includes 6.5 kg of solder.

*PC is not included. Please prepare it yourself.

(Windows 10 or later, CPU : core i5 or more, Memory : more than 8GB, HDD : more than 200MB of free disk space).

*The equipment and PC are connected via a LAN.

*Specifications are subject to change without notice as they are under development.

Desktop Solder


Cell production type

The new desktop-type fluxer we've added to our lineup is perfect for small to medium-batches and multi-variety production. There are numerous options to choose from, allowing you to create a customized soldering environment that best suits your requirements.



Low running cost

Our high-spec models and standard models both use the same solder bath, guaranteeing consistent rotation speed with the impeller directly linked to the motor. The compact design of the solder bath allows for reduced solder usage and less dross formation. This setup, combined with simple maintenance procedures, contributes to lower overall operating expenses.

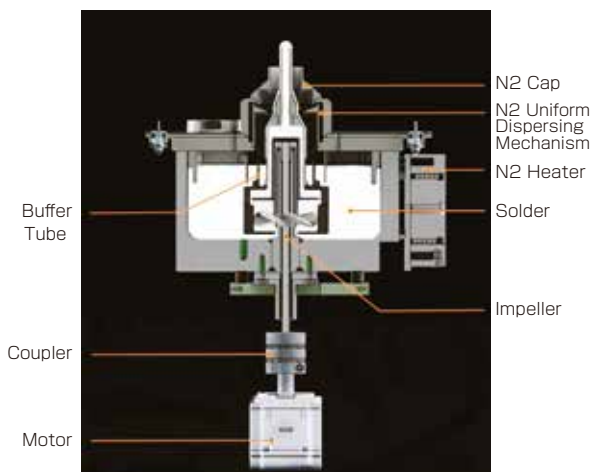

A wide range of options

We have developed a variety of options to accommodate your soldering needs and requirements. Select the option that best suits your preferences.

- Weekly timer
- Stock sensor (without drop detection)
- Photoelectric flow height detection
- Photoelectric flow height detection + automatic flow height control
- Three-light signal tower
- Safety cover
- Area sensor (with front interlock)
- Both side area sensors (without safety cover)
- LAN communication
- Aluminum frame stand

*Specifications are subject to change without notice as they are under development.

Solder Feeder for Automation Equipment SSA

The solder can be fed forward or in reverse and controlled by an external I/O controller. If used to control the solder liquid surface level, it automatically keeps the level constant. In addition, it can be attached to the equipment as a feeder of an automatic soldering system.



Type	SSA
Power	AC100V / AC220V 50/60Hz
Using Motor	DC motor 5W
Solder Wire Diameter	Φ0.3~2.0mm
Solder Feed	External control (high / Low)
Solder Feed Speed	10~30mm/sec.
Solder Feed Reverse	External control (30mm/sec.)
Sensor	clogged / shortage sensor
External Control	Available
Weight	Approx. 2kg
Accessories	I/O Connector, External Power Supply Connector, Power Cable
Option	Solder Wire Feeding Tube

HASL-130

Hot Air Unit

This Hot Air Cartridge has been developed with Apollo Seiko's direct heating technology, which was accumulated by the development and production of our iron cartridges. The fine Hot Air Cartridge enables micro and narrow pitch soldering. The shape and size of the air outlet can be fabricated per your application requirements.

The control unit has excellent response and a very stable high-performance temperature controller. The mass flow controller can regulate accurate air (nitrogen) flow.

It is also possible to use as a pre-heater prior to soldering.

Type	HASL-130
Power Supply	AC100~240V(Single Phase)
Temperature Range	0~500°C
Flow Amount	0.1~5NL/min
Hot Air Cartridge	130W DC Heater
Weight	Control Unit Cartridge Unit
	Approx. 3kg Approx. 0.5kg
Option	Nitrogen Generator APN-05



Control Unit



Cartridge Unit

J-CAT GRT

Peripheral Equipment

Board Cutting Desktop Robot

With the addition of a router life sensor and a USB camera teaching function (optional), the J-CAT GRT is much more efficient and allows for a more stable process.



Type	J-CAT320GRT	J-CAT330GRT	J-CAT340GRT
Divisible Area (W×D×H)	195×190×35mm	295×315×90mm	395×395×82mm
Dimensions (W×D×H)	350×439×632mm	618×586×657mm	647×640×665mm
Weight	28kg	42kg	51kg
Applicable Board Materials	Glass epoxy / Paper phenol laminate, etc. (Maximum thickness 1.6mm)		
Tool Specifications	DC brushless motor Rated speed 40,000rpm 0.2mm (guide value)		
Trace Accuracy	(When Router 0.8mm, Cutting speed 10mm/s, PCB thickness 1.6mm)		
Vacuuming Method	Ejector		
Teaching Method	Remote teaching(JOG) / Manual data input(MDI)		
Power Supply	AC100~240V(Single phase) / 250VA		
Air Supply	0.5MPa (Only dry clean air)		
Air Consumption	200NL/min		
Standard Accessories	Teaching pendant, Manual, Software (Factory installed), Dust collecting kit, Router bit (Consumable) Spare vacuum nozzle		

J-CAT SCD

Screw Tightening Desktop Robot

There are two types of drivers: a Servo and mechanical torque driver.
The robot software can detect a jammed screw, loose screw and driver idling.



Type	J-CAT320SCD	J-CAT330SCD	J-CAT340SCD
Move Area	X=200mm Y=200mm Z=50mm	X=300mm Y=320mm Z=100mm	X=400mm Y=400mm Z=150mm
Dimensions (W×D×H)	268×387×554mm	560×535×659mm	556×631×807mm
Weight	26kg	39kg	47kg
Portable Weight	7kg	15kg	
Max Speed PTP X,Y Axis	700mm/sec	900mm/sec	
*1 Z Axis	250mm/sec	400mm/sec	
Resolution (X,Y,Z Axis) *2	±0.006mm		±0.007mm
External I/O	I/O-SYS Input 16, Output 16		
Teaching Method	Remote Teaching (JOG) / Manual Data Input (MDI)		
Available Screw	M1.0~M6.0mm		
Output Torque	0.03~5.6N·m		
Power Source	AC90~250V(Single Phase)		

*1 Maximum speed cannot be achieved when the robot is bearing its maximum portable load.

*2 Position repeatability is not a guarantee of absolute precision.



TTM-9000N

Manual Soldering Station

The high-powered soldering station provides 200 watts of soldering power. The TTM-9000N is ideal for lead-free soldering due to the extremely fast heat-up and temperature recovery. Statistical temperature data can be downloaded to a PC using an optical USB cable.



Type	TTM-9000N
Power	AC90 ~ 264V (Single Phase)
Heater Capacity	200W(max) DC48V
Grounding Resistance	Less than 2Ω
Temp. Control	PID control
Control Interval	0.1second
Dimensions (W×D×H)	110×137×160mm
Weight	2kg
Max. Power Consumption	380W
Accessories	Soldering Iron Unit, Iron Cartridge, Iron Holder Stand, Tip Removable Pad, Fuse 5A, Power Cable

*These specifications may be changed for improvement without prior notice.

TTM-1000H

Lead Free Manual Soldering Station

This equipment is designed to produce lead free soldering with no static electricity. It is economical because the only necessary replacement part is the Iron tip.



Type	TTM-1000H
Power	AC100V, AC115V, AC220V
Setting Temperature	200~420℃
Heat Capacity	90W
Output Power	36VAC, 400KHz High frequent current
Temp. Consistency	±2℃ (No load)
Raising Time	25sec. (300℃)
Weight	Contraller 2.5kg Iron unit 0.1kg
Accessories	Iron Cartridge Grip, Iron Cartridge, Iron Holder Stand, Power Cable

ZSB-10


Zero Solder Ball Feeder

The ZSB feeder has a built-in roulette cutting blade, which creates evenly spaced holes while precisely feeding solder wire. During soldering, the flux is released evenly through these holes which provides consistent flux coverage without spattering.




Type	ZSB-10
Power	AC100~240V (Single Phase)
Power consumption	65W
Solder Wire Diameter	φ0.4 ~ 1.0mm
Weight	1.5kg
Dimensions (W×D×H)	190×85×80mm
Accessories	Foot Switch, Power Cable
Option	Solder Wire Feeding Tube

TTM-9000N

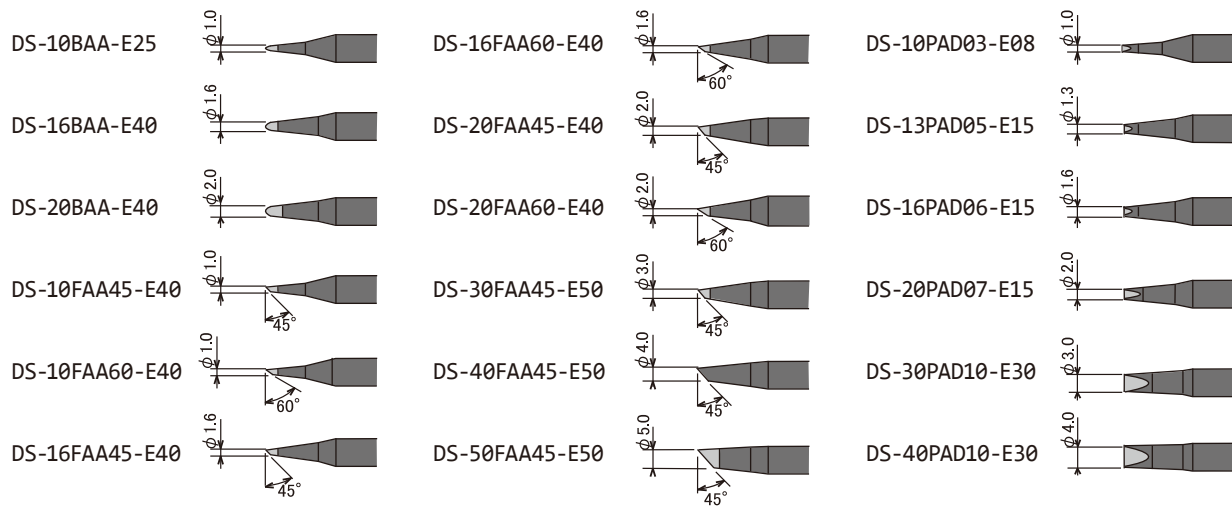


TTM-1000H

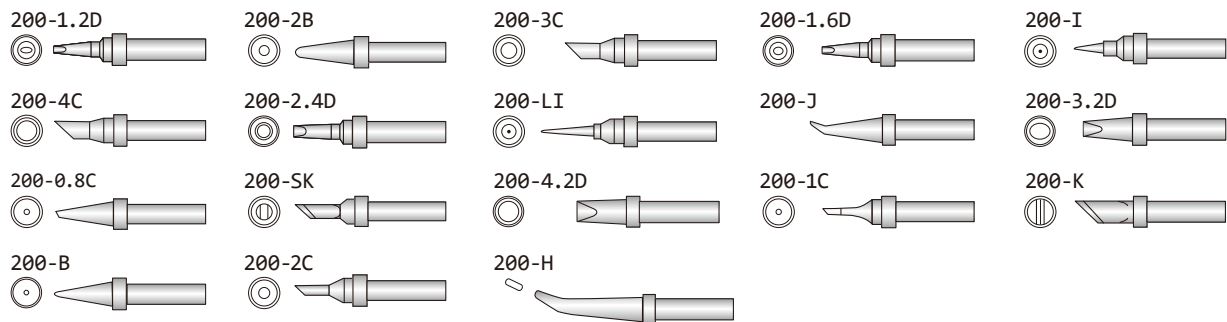


SSB


For 60W (C-60-6)

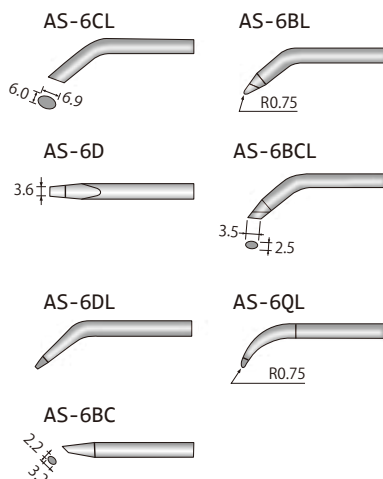


For 100W (SA-100W)

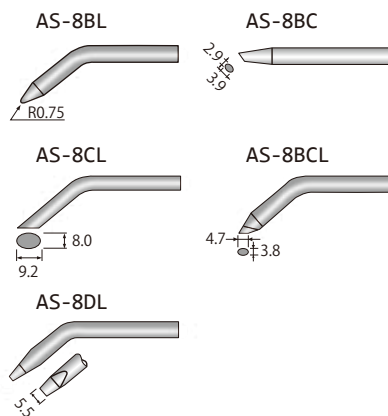

For 150W (SA-150W)

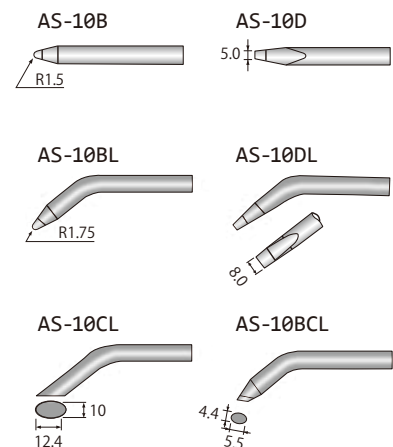

AM iron unit (pistol type) for SSB is compatible with 60W, 100W or 150W heater, and PM iron unit (pencil type) is compatible with 60W heater. Please select an iron cartridge conforming to the specification.

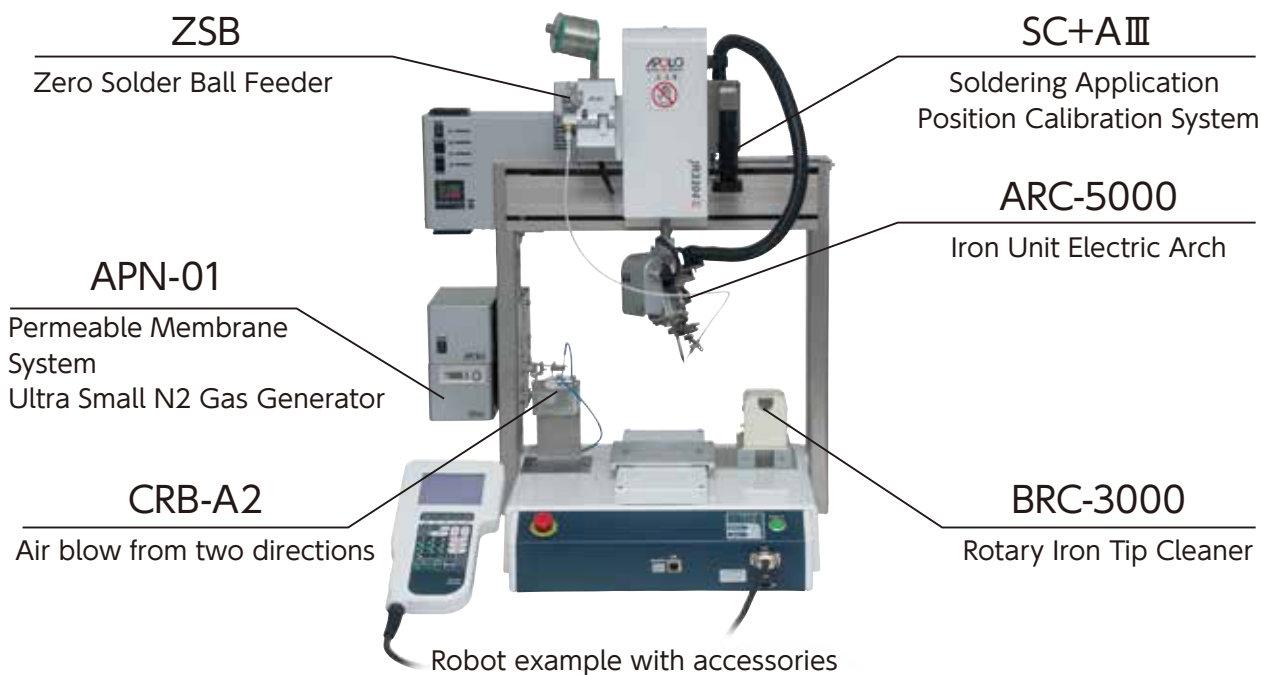

Option	Robot	Iron tip type			
		J-CAT LYRA P7-8	OMEGA P9-10	SR-LYRA II P11	JS-3 LYRA II P12
ARC-5000	Iron Unit Electric Arch P8	○ J-CAT320LYRA cannot be mounted	—	—	○
DRC-1400	Drill Cleaner for sleeve P17	—	—	—	—
ZSB	Solder ball spattering prevention roller P39	○	○	○	○
YPH-10	Solder Wire Pre-heater P39	○	○	○	○
CRB CRB-A2	Air blow from two directions P40	○	○	○	○
Rudra	Cyclone type iron tip cleaner P40	△ *1	—	—	△ *1
SRC-3000 SRC-500DC BRC-3000	Rotary Iron Tip Cleaner P40	○	△ *2	○	○
SC+AⅢ	Soldering Application Position Calibration System P41	○	—	—	○
CVR-2100	High-Quality Portable Video Recorder P41	○	○ *3	○	○
4K-REMOCA-FF	Monitoring camera with recording function P42	○	○	○	○
CSS-2100	Small Soldering Camera Monitor P42	○	○	○	○
APN-01 APN-12	N2 Gas Generator P43	○	○	○	○
NCM-02	N2/O2 Concentration Measuring Instrument P44	○	○	○	○
F2R-3000	Automatic Tool Position Correction Unit P44	○	—	—	○
TTM-140	Tip Thermometer P44	○	○	○	○
VAC-1000 VAC-3000	Fume Extractor P45	○	○	○	○
VAC-4001A VAC-4002A	Fume Extractor P45	○	○	○	○



Robot example with accessories

Iron tip type		Sleeve type		IH
L-CAT EVO- II P13-14	JC-3 LYRA II P25-26	J-CAT CMS P15-18	CMS-1AU P18	J-CAT WAVE P23-24
—	○	—	—	—
—	—	○	○	—
○	○	—	—	○
○	○	—	—	○
○	○	—	—	—
—	△ *1	—	—	—
○	○	—	—	—
—	○	○	—	—
○	○	○	○	○
○	○	○	○	○
○	○	○	○	○
Standard equipment in the robot	○	○ Standard equipment	Standard equipment in the controller	—
○	○	○	○	—
—	○	○ Standard equipment	—	—
○	○	○	○	—
○	○	—	—	—
○	○	○	○	○

*1 It can be used only when using ARC-5000

*2 It needs to control the I/O of the unit when using SRC-500DC or BRC-3000

*3 When it uses the alarm signal of APN-01, connect to an external device.


ZSB

Solder Ball Spattering Prevention Roller


The built-in roulette cutting blade makes evenly spaced holes, while precisely feeding solder wire. During soldering, flux is released evenly through these holes. This provides consistent flux coverage without spattering and allows the solder to melt on a clean, active surface.



Comparison Test Results:

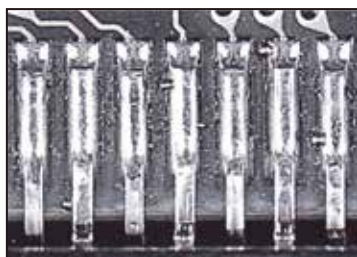


Solder ball spreading test without ZSB

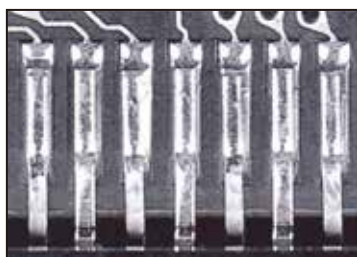

Solder ball spreading test with ZSB

Test Results

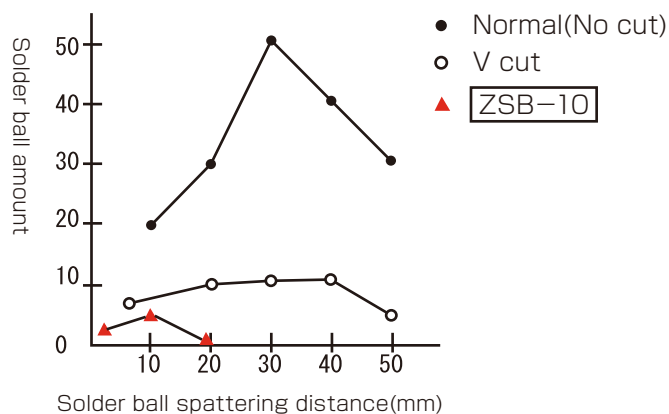

Comparison Test Conditions	
Iron Temperature	350°C
Solder Feeding speed	10mm/sec
Solder Feeding Quality	100mm
Solder Diameter	0.5mm (.020")
	Sn60%Pb40%
	Flux2%

YPH-10

Solder Wire Pre-heater

The stainless steel sleeve is equipped with two heaters to pre-heat the solder wire as it is being fed. This helps to prevent solder ball spattering by pre-heating the solder wire & internal flux. This is designed to be used with large diameter solder wire and is effective in reducing tact/cycle time, as well as improving quality in lead free and tin/lead applications.



Solder Wire Heater



Temperature Controller

Type	YPH-10
Setting Temperature	0 ~ 150°C
Heater Capacity	10W
Power Source	AC100 ~ 240V (Single Phase)
Solder Wire Diameter	φ1.0 ~ 1.6mm (φ0.8 optional)
Constitution	Temperature Controller, Solder Wire Heater, Attaching Bracket, Heater Cable, Power Cable, Feeding Tube

Iron Tip Cleaners

You can select the iron tip cleaner based upon your application.

Air Blow Iron Tip Cleaner

CRB

Air blow from one direction



CRB-A2

Air blow from two directions (front & back)



Rudra

Cyclone type iron tip cleaner



*Rudra can only be used with the ARC-5000

Rotary Iron Tip Cleaner

SRC-3000

The wet sponges rotate in one direction to clean the iron tip. The soldering debris drops down into the reservoir below.



SRC-500DC

Based upon the I/O signal, the wet sponges can be programmed to rotate forward or backward to allow for more thorough tip cleaning.



BRC-3000

The stainless steel brushes rotate to remove oxides from the tip and are designed to be utilized in lead free process.



SC+AⅢ


Soldering Application Position Calibration System

The position calibration camera has been designed exclusively for use with our soldering robots.




Useful for solving problems with solder substrate position. Calculates the difference in the position that may occur in the movement of the workpiece or problems with the accuracy of the jig.

It detects the difference in the original position by checking the fiducial, or other specific point, and comparing it with the original position. It then sends this coordination data to the robot. The robot calculates the necessary adjustments for a proper soldering process.

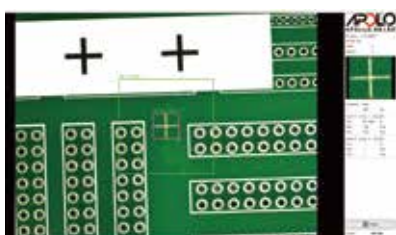

SC+AⅢ can use the Teaching Pendant for settings so no PC is required. Configuring the image processing is easy by following the on-screen steps.

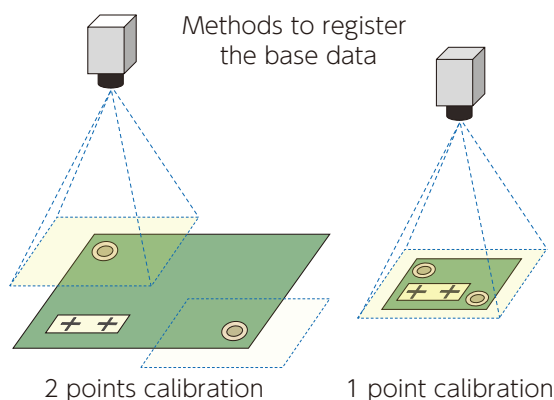

Type	SC+AⅢ
Mountable Robot	J-CAT/JC-3/JS-3 Series
Sensor	1/1.8" Color CMOSsensor /Rolling shutter
Image Processing	FPGA High speed picture processing engine (Incorporating camera)
Effective Pixels	1600×1200
Search Method	Pattern matching (with Masking function / Pre-processing filter)
Registered Model Number	100 models
Setting Method	No PC necessary / Enable to set by main unit
Robot Coordinates Calibration	X,Y,R-Axes
Accessories	Camera for position calibration, lens, Ring Lightning (White),Mounting bracket, LAN cable

CVR-2100

High-Quality Portable Video Recorder

Connecting the CSS-2100 camera to this CVR-2100 device allows for real time recording of the soldering process. The stored data on the SD card makes it easy to transfer to a PC.

Type	CVR-2100
Memory Type	SD card (Max. 32GB)
Resolution	1280×720 pixels
Video Input	Composite AV input
Video Output	HDMI / Composite AV output
Weight	260g
Dimensions (W×D×H)	75×25×130mm
Battery	4400mAH (Max. recording time 9h)
Accessories	Multi-adaptor, USB cable, AV cable



4K-REMOCA-FF

Monitoring Camera with Recording Function

Equipped with a 4K camera to capture high-resolution images and videos. This camera has the ability to record still images and videos on the main unit. Ideal for programming teaching as well as process monitoring.



Model	4K-REMOCA-FF
CMOS Sensor	IMX258
Adjustable focus range	Adjustable range from the lens tip to 100mm
Resolution (HDMI)	Horizontal and vertical resolution of 1300TV lines or higher (4K@30fps). Horizontal resolution of 1300TV lines or higher (4K@30fps).
Zoom	Maximum digital zoom of 16x
Power Consumption	USB 2.0 standard or lower, AC adapter 6W or lower. SD card (for recording only) USB-C
Interface	Analog RGB Mini D-SUB15P (female) HDMI TYPE-A Power input connector Control: RS485, GPIO
Cable between the head unit and the base unit	Cable type: Robot cable Length: 5m, Diameter: Φ6.5mm
Dimensions	Head unit FF lens Φ20×42mm Base unit: W151×D83×H24mm
Weight (Head unit includes cable)	Head unit FF lens approximately 300g Base unit approximately 300g
Operating temperature range	0°C ~ 40°C

*Specifications are subject to change without notice for improvement purposes.

CSS-2100

Small Soldering Camera Monitor

This micro camera easily attaches to the Apollo soldering robot. The function of the CMOS camera is for teaching and process monitoring. Due to the miniature size, each camera can be easily integrated on all Apollo robots.

When attaching to the equipment



Monitoring image

Type	CSS-2100
Sensor	1/4inch color CCIQ II
Indication Pixel	316K pixel
Resolution	400TV Line
Picture Signal	NTSC video
Focus Distance(Min.)	Approx. 20mm
Min.Vision Area	Approx. 5mm (D) ×40mm (W)
Focus Distance(Max.)	Approx. 100mm
Max.Vision Area	Approx. 30mm (D) ×40mm (W)
Ambient Environment	-10°C~45°C, 85% no condensation
Voltage	DC5~12V(AC100~240V Multi Adaptor)
Power Consumption	50mA
Accessories	Attaching Bracket, Adapter, Power+Data Cable

Nitrogen Gas Generator

Nitrogen gas helps eliminate oxidation of the iron tip and soldering surface.
It also increases solder wettability and provides better results and minimizes solder defects.

APN-01 For a desktop robot

Permeable Membrane System Ultra Small N2 Gas Generator

This is an ultra small N2 gas generator which can be built into a soldering robot or attached externally.



Type	APN-01
Nitrogen Gas Flow	0.3 ~ 0.6L/min
Nitrogen Gas Con	99% (When nitrogen gas flow 0.5L/min)
Air supply	0.4 ~ 0.5MPa (Only dry & clean Air)
Power Supply	AC100 ~ 240V less than 1.4W
Dimensions (W×D×H)	Approx. 110×200×100mm
Weight	Approx. 1.4kg
Accessories	Power Adapter, I/O Connector, Air Tube (2 types), Air Cock

APN-12 For desktop robots

PSA System Small N2 Gas Generator

It is a high performance model that can be used with more than one robot.
Its compact design allows for greater portability.



Type	APN-12
Nitrogen Gas Flow	1.2NL/min
Nitrogen Gas Con	99.99%
Air Supply	0.65~0.7MPa (only dry & clean air)
Discharge Pressure	0.5MPa
Power Supply	AC100~240V 50/60Hz
Dimensions (W×D×H)	Approx. 310×270×310mm
Weight	Approx. 18kg
Noise Value	50dB

NCM-02

N2/O2 Concentration Measuring Instrument

It can measure N2 concentration up to: 99.9%, O2 concentration: 25%.
The level of N2 gas generation is measured precisely.



Type	NCM-02
Display Value	100-O2 Concentration (%)
Measuring Range	99.9~75%(N2) 0.1~25%(O2)
Overall Accuracy	± 1.0%FS (It conforms to O2)
Power Supply	AC100~220V (with an adaptor)
Power Consumption	Less than 15W
Weight	0.5kg
N2 Enclosing Port	for ϕ 4mm tube / One-Touch Connector

F2R-3000

Automatic Tool Position Correction Unit

This optical sensor prevents mis-alignment as the tip plating wears.



Type	F2R-3000
Sensor	Optical sensor (For X/Y-axis) Low-contact touch sensor (For Z axis)
Correction Accuracy	± 0.1mm (X/Y/Z-axis)
Maximum tool type registable number	50 Type
Power Supply	DC12 ~ 24V
Power Consumption	200mA
Dimensions (W×D×H)	77×144×54mm
Weight	Approx. 0.7kg
Accessories	Main unit
Option	I/O SYS Cable, Attaching Plate

TTM-140

Tip Thermometer

This well-designed sensor allows for easy placement and accurate readings for iron tips.
It achieves stable measurement within seconds.



Type	TTM-140
Power Supply	AA battery LR6 × 4 pcs. : 6V
Dimensions (W×D×H)	83×140×42mm
Weight	150g (w/o battery)
Temperature Resolution	1°C
Temperature Measuring Range	Sensor (TIM-140S) : 0~500°C Probe (TIM-140SP) : 0~700°C
Temperature Accuracy	0~500°C→±3°C / 501~700°C→±4°C(excluding sensor error)
Operating Environment	0~50°C 20~85%RH (no condensation)
Accessories	Sensor 3pcs / AA battery LR6x4 pcs

Fume Extractor

We recommend the use of a Fume Extractor in order to prevent solder fumes from irritating the eyes, nose and throat. Also, they prevent fumes from accumulating on the equipment. Below are the types of Fume Extractors we offer.

VAC-1000 / 3000



If there is no air duct near the work space, use the VAC-3000 together with VAC-1000. Three carbon filters remove solder fumes and clean exhaust.



Type	VAC-3000
Filtering Rate	More than 95%, 0.3 μ m
Vacuum Type	Ejector
Air supply	0.5Mpa (Dry Air)
Noise Level	Below 82dB
Dimensions (W×D×H)	194×170×308mm
Weight	Approx. 4.0kg

VAC-4001A / VAC-4002A



This triple filtering design allows for 99.97% efficiency. The equipped DC motor is low noise, low vibration and low power consumption. The high-power motor generates large air flow.

Type	VAC-4001A	VAC-4002A
Power Supply	100~110V AC or 220~240V AC	100~110V AC or 220~240V AC
Power Consumption	120W	250W
Air Flow	140m ³ /h	250m ³ /h
System Flow (Including filter)	120m ³ /h	100m ³ /h×2
Filtering Efficiency	99.97% (0.3 μ m)	99.97% (0.3 μ m)
Duct Hose Length	ϕ 75mm×1500mm	ϕ 75mm×1500mm×2
Static Pressure	2400Pa	3000Pa
Noise	60dB	65dB
Dimensions (W×D×H)	420×230×430mm	470×230×500mm
Weight	13.4kg	14.2kg

EFA-1300

This is a desktop type portable fan. Its compact design allows for greater portability.



Type	EFA-1300
Power source	AC110/220V
Dimensions (W×D×H)	130×130×10mm
Weight	1.5kg

System15 / Purex

Solder fumes are vacuumed through a silicone tube mounted directly to the point of soldering. The combination of the two filtering units (pre-filter & HEPA filter) removes all harmful gases, thus preventing flux build-up on the iron and extending tip life all while keeping the environment clean and safe.

Type	System15
Filtering Rate	More than 99.997%, 0.3 μ m (HEPA)
Vacuum Type	IP54 Synchronous (Brushless) motor
Air Flow	70m ³ /Hr
Noise Level	Below 50dB
Dimensions (W×D×H)	360×330×500mm
Power	AC230V 1ph 50Hz or 110V 1ph 60Hz



Type	Purex
Filtering Rate	More than 99.997%
Wattage	50W / 75W
Air Flow	100m ³ /hr 59cf/m
Noise Level	52 dBA
Dimensions (W×D×H)	455×480×720mm
Power	AC230V +/- 10%, 120V +/- 10%



High-quality Lead-Free Solder

The most suitable resin solder wires for an automated soldering process.

C114 Series

Higher reliability for automotive devices.

Thanks to its transparent flux residue there is no burnt residue on the PCB.

Can apply with laser solder

Confirmation of wettability with laser soldering

C114 series ASW01 (Sn3Ag-0.5Cu)
Wetting ratio: 98.3%



other supplier's (Sn-3Ag-0.5Cu)
Wetting ratio: 63.0%



【Condition】
Beam power: 40W Wire Diameter: $\Phi 0.8\text{mm}$
Preheat: 0.05s Wire feed: 7mm/s, 1.6s
Postheating: 0.3s PCB: Cu, one side
Connector terminal: Brass, Sn plating on Ni

Very few spattering

Flux spattering test using a soldering iron robot

C114 series

other supplier's



Minimal spattering

High spattering

Collect spattered flux onto thermal paper.



【Condition】
Iron temp: 380°C
Feed speed: 25mm/s
Feed length: 5mm×200 shots

Clear appearance after soldering

Flux color test

C114 series

other supplier's



No color

Brown color

Achieve higher productivity for quality inspection

C231 Series

This solder suppresses the generation of carbides. It makes this resin solder wire suitable for the sleeve soldering process. An activator that exhibits stable wettability in a short period of time at high temperatures.

Suppressing carbide Generation

Flux residue after heating

C231 series

other supplier's



Almost no residue

Brown residue is generated

【Condition】
Heating temperature: 360°C Atmosphere: N₂
Heating rate: 1.3°C/s Holding time: None

Excellent wettability

Comparison wettability for through-hole soldering

C231 series

other supplier's




Good wettability

Insufficiency of wettability

【Condition】
Iron temperature: 360°C
Application: Cu through-hole

Suppressing flux residues to soldering equipment

Comparison of flux residual rate after heating

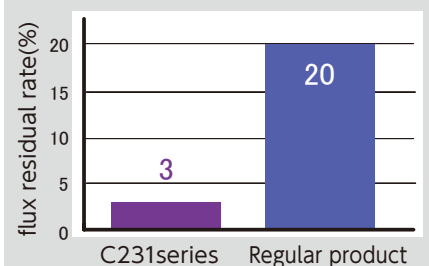

【Condition】
Heating temperature: 360 °C、 Atmosphere: N₂
Heating rate: 1.3 °C / s、 Holding time: None

C240 Series

This solder wire is halogen free and complies with all halogen-free standards. Through the addition of specific active agents, it exhibits the same level of wettability as halogen-containing products.

Good wettability

Soldering test to through-hole board




Good wettability for through-hole board

【Condition】
Iron temp. : 360℃
Iron speed : 5mm/s
PCB:Cu, both side

Solderable to the flame base material

Wettability test for base material plate

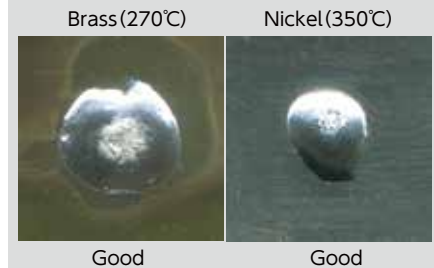

Solderable to various base material

Halogen-free compliant

Compliant situation of C240 series

Standards	Compliant situation
JPCA-ES01	compliant
IEC61249-2-21	compliant
IPC4101B	compliant
JEITA ET-7304A	compliant


Compatible to all of halogen-free standards

C241 Series

The materials are well-suited for quick heating using a laser. They exhibit good wettability even at low power levels, and minimize heat-related damage to the components being processed.

Good workability for flame base material

Wettability test by light beam to Ni

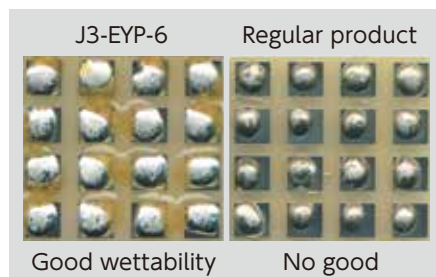


Ensures good wettability even at low output

【Condition】 Beam power : 22W Wire diameter : ϕ 0.8mm
Preheat : 0.2s Feed : 5mm/s, 1.0s Postheat : 0.2s
Pad : Ni, 3mm

Very few spattering

Flux spattering test by using soldering iron robot

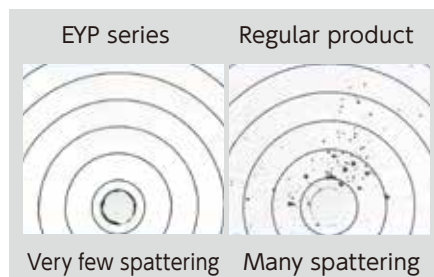

Collect spattered flux onto thermal paper.

Solder Wire for AF series



■ Solder wire

Type	ASW01	ASW02	ASW03
Alloy Composition	Sn96.5 Ag3.0 Cu0.5	Sn99.0 Ag0.3 Cu0.7	Sn99.3 Cu0.7
Solder Diameter	2 mm		
Bobbin	2Kg		
Characteristic	Feeding for AF series		

Apollo Seiko Resin Solder Wires

Flux Type	Alloy Composition	Flux Content	Characteristic
C114	Sn96.5 Ag3.0 Cu0.5	4.0% / 6.0%	Minimal Spattering
	Sn99.0 Ag0.3 Cu0.7		
	Sn99.3 Cu0.7		
C220	Sn96.3 Ag3.5 Ni0.2	3.0%	For aluminum part
C231	Sn96.5 Ag3.0 Cu0.5	3.0%	For CMS
C240	Sn96.5 Ag3.0 Cu0.5	3.0%	Completely halogen free
C241	Sn96.5 Ag3.0 Cu0.5	3.0% / 4.0%	For laser / Halogen free

*Available in various solder wire diameters, forms, flux contents.



WICK GUN

Wick Dispenser to Absorb Solder

The desoldering "Wick Gun" is easy to feed and absorb solder. The used wick can easily be cut with one hand by pulling the built-in trigger.



Model1000-1 Standard Parts

1×Model 1000-1 dispenser

1×W4015-1 cassette


Model1000 Spare Parts

Parts No.	Description & Size (Width, Length)
W4015-1	Wick cassette #1, W=0.9 mm L=4.57m
W4015-2	Wick cassette #2, W=1.5 mm L=4.57m
W4015-3	Wick cassette #3, W=2.2 mm L=4.57m
W4015-4	Wick cassette #4, W=2.9 mm L=4.57m
W10010	Cutter blade

BONPEN

Flux Dispenser Pen

This flux pen enables fine and accurate flux application. Various shapes of pen tips are available including both flat or bullet shape.

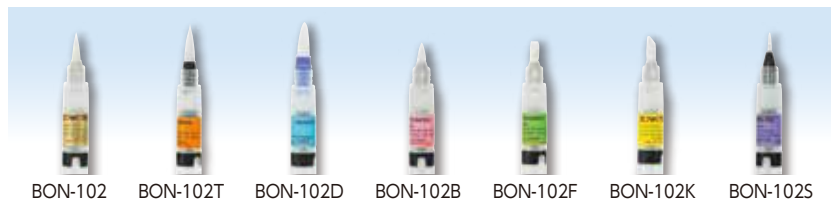

CYBERSOLV C8502

Full Strength Maintenance Cleaner

This flux remover is a non-flammable solvent specifically designed to remove flux residues.



*The small size is for trial.

Iron Cartridge

Many types of iron cartridges are available with varying heater types & overall length.

DS: DC48V: Total length 101mm DM: DC48V: Total length 145mm

TS: AC100V: Total length 101mm TM: AC100V: Total length 145mm


DN: DC48V: Total length 101mm with nitrogen sleeve

Configuration:  —  shape
Type — “Size & Tip”


(Eg: DS-08PAD03-E08)

Point Soldering Iron Cartridge


TS/DS/DN Cartridge

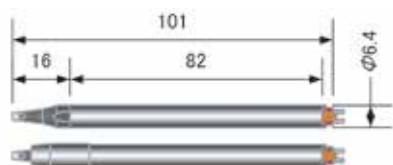

TM/DM Cartridge

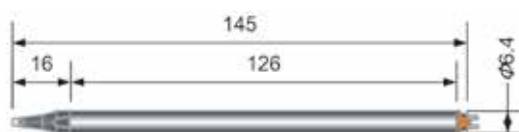


PAD/PDS

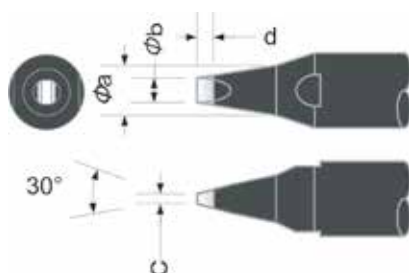


Type	a(mm) diameter	b tip width	c thickness	d plating size
** -10PAD03-E08	3	1.0	0.3	0.8
** -13PAD05-E15	4	1.3	0.5	1.5
** -16PAD06-E15	4	1.6	0.6	1.5
** -20PAD07-E15	4	2.0	0.7	1.5
** -24PAD08-E15	4	2.4	0.8	1.5
** -30PAD10-E30	5	3.0	1.0	3.0
** -40PAD10-E30	5	4.0	1.0	3.0
** -50PDS-E40	5	5.0	1.3	4.0
** -60PDS-E40	6	6.0	1.3	4.0
** -80PDS-E50	8	8.0	1.6	5.0

PAD/PDS

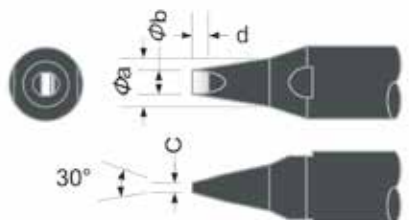


Type	a(mm) diameter	b tip width	c thickness	d plating size
** -10PAD03-B08	3	1.0	0.3	0.8
** -13PAD05-B15	4	1.3	0.5	1.5
** -16PAD06-B15	4	1.6	0.6	1.5
** -20PAD07-B15	4	2.0	0.7	1.5
** -24PAD08-B15	4	2.4	0.8	1.5
** -30PAD10-B30	5	3.0	1.0	3.0
** -40PAD10-B30	5	4.0	1.0	3.0
** -50PDS-B40	5	5.0	1.3	4.0
** -60PDS-B40	6	6.0	1.3	4.0
** -80PDS-B50	8	8.0	1.6	5.0

PDZ

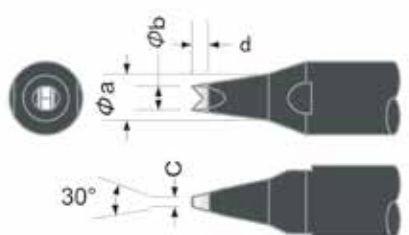


Type	a(mm) diameter	b tip width	c thickness	d plating size
** -13PDZ08-EZ15	4	1.3	0.5	1.5
** -16PDZ12-EZ15	4	1.6	0.6	1.5
** -20PDZ14-EZ15	4	2.0	0.6	1.5
** -24PDZ16-EZ15	4	2.4	0.8	1.5
** -30PDZ20-EZ30	5	3.0	1.0	3.0
** -40PDZ24-EZ30	5	4.0	1.0	3.0
** -50PDZ35-EZ40	5	5.0	1.3	4.0

GDV

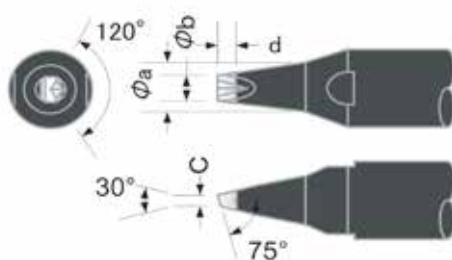


Type	a(mm) diameter	b tip width	c thickness	d plating size
** -10GDV07-EZ10	3	1.0	0.4	1.0
** -13GDV08-EZ15	4	1.3	0.5	1.5
** -16GDV10-EZ15	4	1.6	0.6	1.5
** -20GDV14-EZ15	4	2.0	0.8	1.5
** -24GDV14-EZ15	4	2.4	0.8	1.5
** -30GDV17-EZ30	5	3.0	1.0	3.0
** -40GDV17-EZ30	5	4.0	1.0	3.0
** -50GDV17-EZ40	5	5.0	1.0	4.0
** -60GDV23-EZ40	6	6.0	1.3	4.0

GDV

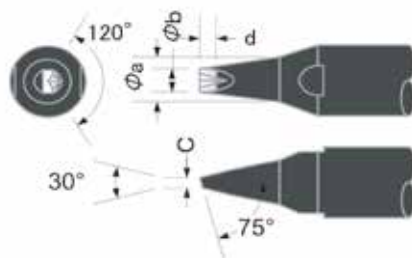


Type	a(mm) diameter	b tip width	c thickness	d plating size
** -10GDV07-BZ10	3	1.0	0.4	1.0
** -13GDV08-BZ15	4	1.3	0.5	1.5
** -16GDV10-BZ15	4	1.6	0.6	1.5
** -20GDV14-BZ15	4	2.0	0.8	1.5
** -24GDV14-BZ15	4	2.4	0.8	1.5
** -30GDV17-BZ30	5	3.0	1.0	3.0
** -40GDV17-BZ30	5	4.0	1.0	3.0
** -50GDV17-BZ40	5	5.0	1.0	4.0
** -60GDV23-BZ40	6	6.0	1.3	4.0
** -80GDV60-BZ50	8	8.0	1.6	5.0 V溝 150°

GAV

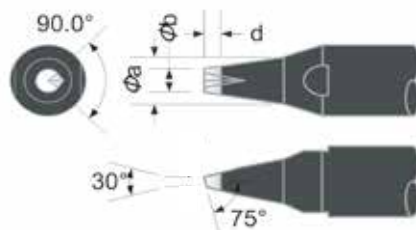


Type	a(mm) diameter	b tip width	c thickness	d plating size
** -20GAV14-EZ15	4	2.0	—	1.5
** -24GAV17-EZ20	4	2.4	—	2.0
** -30GAV21-EZ30	5	3.0	—	3.0
** -40GAV28-EZ30	5	4.0	—	3.0

PCA/PCS

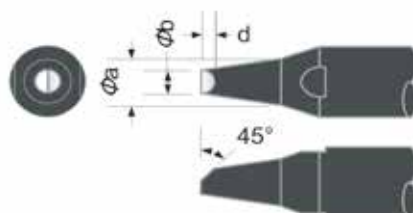

Type	a(mm) diameter	b tip width	c thickness	d plating size
** -10PCA-B	3	1.0	—	—
** -13PCA-B	3	1.3	—	—
** -16PCA-B	4	1.6	—	—
** -20PCA-B	4	2.0	—	—
** -24PCA-B	4	2.4	—	—
** -30PCA-B	5	3.0	—	—
** -40PCA-B	5	4.0	—	—
** -50PCS-B	5	5.0	—	—
** -60PCS-B	6	6.0	—	—
** -80PCS-B	8	8.0	—	—


PCZ

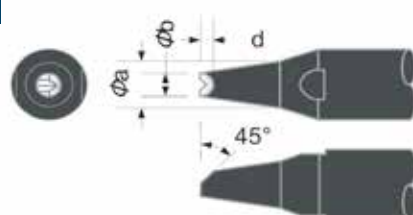


Type	a(mm) diameter	b tip width	c thickness	d plating size
** -20PCZ10-BZ	4	2.0	—	—
** -24PCZ12-BZ	4	2.4	—	—
** -30PCZ14-BZ	5	3.0	—	—
** -40PCZ16-BZ	5	4.0	—	—
** -50PCZ24-BZ	5	5.0	—	—

Slide Soldering Iron Cartridge


TS/DS/DN Cartridge

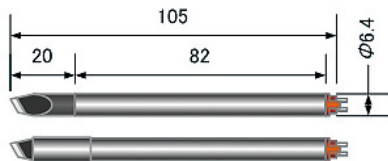

TM/DM Cartridge




KAA

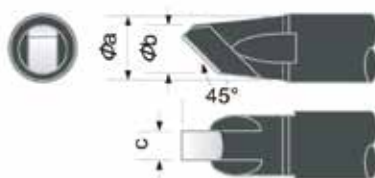

Type	a(mm) diameter	b tip width	c thickness	d plating size
** -16KAA45-B	6.0	3.4	1.6	—
** -20KAA45-B	6.0	3.4	2.0	—
** -24KAA45-B	6.0	4.0	2.4	—
** -30KAA45-B	6.0	4.5	3.0	—
** -40KAA45-A	6.0	5.5	4.0	—
** -50K45AS-A	6.0	6.0	5.0	—


RDD

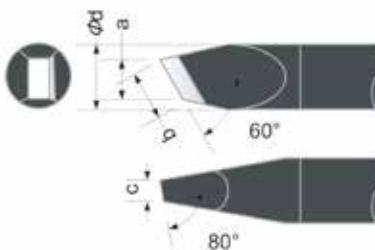


Type	a(mm) tip width	b thickness	c diameter	d
** -20RDD-B20	2.0	—	0.6	6.4
** -24RDD-B20	2.4	—	0.6	6.4
** -30RDD-B20	3.0	—	0.6	6.4
** -40RDD-B20	4.0	—	0.9	6.4
** -50RDD-B20	5.0	—	1.3	8.0

Heat Storage Type Iron Cartridge


TB/SB Cartridge

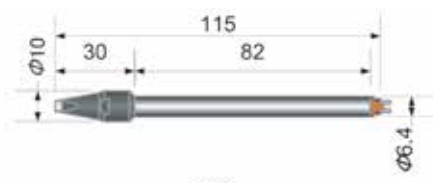

MB/DB Cartridge

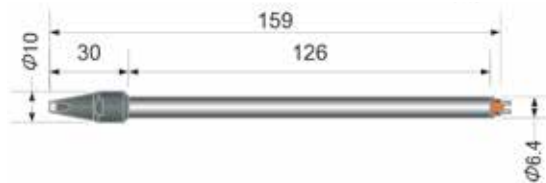


PAD

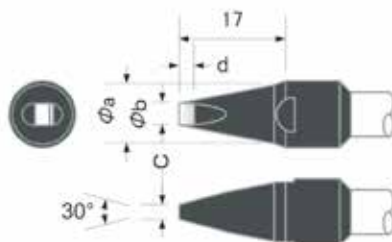


Type	a(mm) diameter	b tip width	c thickness	d plating size
*B-16PAD06-B20	7	1.6	0.6	2.0
*B-20PAD07-B20	7	2.0	0.7	2.0
*B-24PAD08-B20	7	2.4	0.8	2.0
*B-30PAD10-B30	8	3.0	1.0	3.0
*B-40PAD10-B30	8	4.0	1.0	3.0
*B-50PAD10-B30	8	5.0	1.0	3.0

GDV

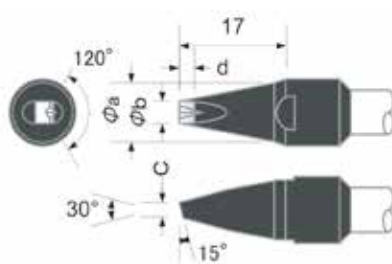


Type	a(mm) diameter	b tip width	c thickness	d plating size
*B-16GDV10-BZ20	7	1.6	0.6	2.0
*B-20GDV12-BZ20	7	2.0	0.7	2.0
*B-24GDV14-BZ20	7	2.4	0.8	2.0
*B-30GDV17-BZ30	8	3.0	1.0	3.0
*B-40GDV17-BZ30	8	4.0	1.0	3.0
*B-50GDV23-BZ40	8	5.0	1.3	4.0

PCA

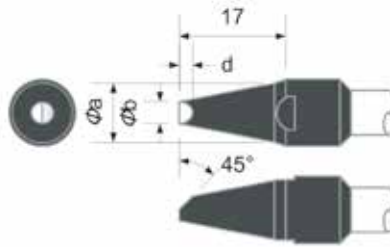


Type	a(mm) diameter	b tip width	c thickness	d plating size
*B-24PCA-B	7	2.4	—	—
*B-30PCA-B	8	3.0	—	—
*B-40PCA-B	8	4.0	—	—

KAA

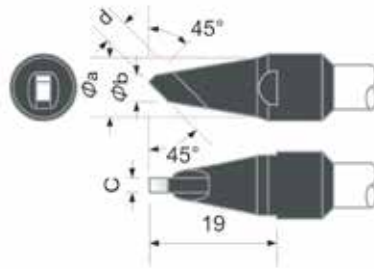

Type	a(mm) diameter	b tip width	c thickness	d plating size
*B-16KAA45-B10	8	3.4	1.6	—
*B-24KAA45-B10	8	4.0	2.4	—
*B-30KAA45-B10	8	4.5	3.0	—
*B-40KAA45-B10	8	5.5	4.0	—

RDD

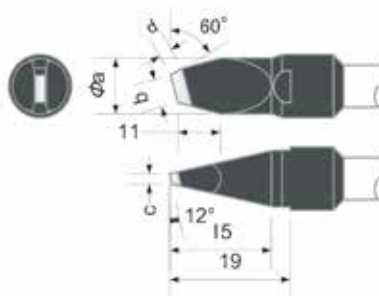

Type	a(mm) diameter	b tip width	c thickness	d plating size
*B-30RDD-B15	8	3.0	0.6	1.5
*B-40RDD-B20	8	4.0	0.9	2.0
*B-50RDD-B25	8	5.0	1.3	2.5

N2 Nozzle

This external nozzle supplies nitrogen gas to large bodied iron tips such as heat storage type or X tip type.



One Touch Quick Change Iron Cartridge DX

The patented design of the one-touch quick-change DX iron is easy to change and there is no position variation after tip replacement.

Patented




Custom Made Iron Cartridge

Upon request, various custom tips can be made. Feel free to request.



The flexible double layer solder feed tube provides for smooth and precise feeding of solder wire. Please specify the optimal tube set for the robot unit along with the solder wire diameter and point/slide soldering.

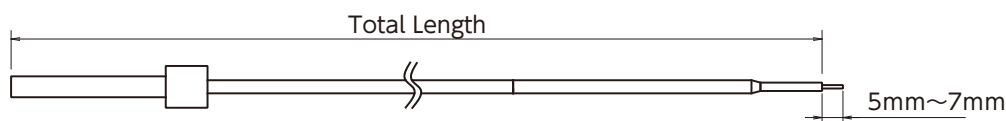

Configuration: **TAL** **1.0** — **650** **S60** Eg) Point soldering feeding tube
Solder Wire Diameter: 1.0mm
Total length:650mm

Tube Type

TAL		L-CAT EVO-II L-CAT NEO-N J-CAT Series JS-3 / SR Series OMEGA TERRA LUNA YPH-10 SZB-8000
TR		SSA
TU		SSB
TZB		ZSB-10 SZB-7000

Solder Wire Diameter

φ0.3, 0.4, 0.5, 0.6, 0.8, 1.0, 1.2, 1.6, 2.0 mm

*Please contact us about the solder wire except for the above.

Tube Total Length

The requested length can be fabricated.
Recommended Length is as follows:

Model	Point Soldering	Slide Soldering
L-CAT NEO-N	650mm	780mm
L-CAT EVO-II	450mm	600mm
J-CAT320	650mm	780mm
J-CAT330	750mm	880mm
J-CAT340	750mm	880mm
JS-3/SR SCARA Series	650~1000mm	
OMEGA TERRA LUNA	1500mm	
SSA/SSB/ SZB-7000/ SZB-8000	1500mm	
ZSB-10	700mm	

*Recommended length is as above.
(It is also the recommended length for YPH-10)



Nozzle Type

S60		For Point Soldering, SSA, ZSB-10 (Solder Wire Diameter φ0.3-1.2mm)
S60		For Point Soldering, SSA, ZSB-10 (Solder Wire Diameter φ1.6 - 2.0mm)
S90		For Slide Soldering, SSA, ZSB-10 (Solder Wire Diameter φ0.3 - 1.2mm)
S90		For Slide Soldering, SSA, ZSB-10 (Solder Wire Diameter φ1.6 - 2.0mm)
N55		Needle Type*
Y	No nozzle	For YPH-10
L		For SSB PM-L Iron Unit (Pencil)
S		For SSB PM-S Iron Unit (Pencil)
V		For SSB AM Iron Unit (Pistol)
H120		For ZSB-10
S150-L		For SZB-7000 PM Iron Unit (Pencil) For SZB-8000 PM Iron Unit (Pencil)
S150-R		For SZB-7000 AM Iron Unit (Pistol)
Z30		For SZB-8000 AM Iron Unit (Pistol) (Solder diameter: φ0.4~0.65mm)
Z30		For SZB-8000 AM Iron Unit (Pistol) (Solder diameter: φ0.8~1.2mm)
Z30		For SZB-8000 AM Iron Unit (Pistol) (Solder diameter: φ1.6mm)

*N55 Needle Size : N55-N **

Solder Wire Diameter

KTU Feeding Tube Set

Type : TAL * . * - * * KTU

Solder Wire Diameter Total Length

Spare Parts


TAL * . * - * * (Tube)

KTU-HOL (Needle Holder)



KTU-N * . * (Needle)

Solder Wire Diameter



*The standard type is φ0.3-1.0.
Please contact us about another diameter.

Apollo Seiko Ltd.

Registered Date : October 1,1969

E-mail: sales@apolloseiko.co.jp <https://www.apolloseiko.co.jp>



Head Office & Factory	2271-7 Jinba, Gotenba-Shi, Shizuoka, Japan 412-0047 TEL : 0550-88-2828 FAX : 0550-88-2830
Tokyo Office	101, 5-31-2 Aoto, Katsushika-Ku, Tokyo, Japan 146-0082 TEL : 03-5650-3124 FAX : 03-5650-3125
Nagoya Office	1-3-4, Shioya-cho, Minami-ku, Nagoya-shi, Aichi, Japan 457-0078 TEL : 052-728-6961 FAX : 052-824-7300
Osaka Office	Honmachi Sankei Build. 7F, 4-3-9 Chuo-ku, Osaka-shi, Osaka, Japan 541-0053 TEL : 06-6443-6009 FAX : 06-6281-8056
Fukuoka Office	Hakata Gion M-SQUARE Build. 6F, 2-1 Reisenmachi, Hakata-ku, Fukuoka-shi, Fukuoka, Japan 812-0039 TEL : 092-600-0920 FAX: 092-262-9806
Nagano Office	5239-1, Toyohira, Chino-shi, Nagano, Japan 391-0213 TEL : 090-5206-3151
Shin-Yokohama Office	Yusen Shin-Yokohama Build. 3F, 3-17-2, Shin-Yokohama, Kita-ku, Kouhoku-ku, Yokohama-shi, Kanagawa, Japan 222-0033 TEL : 045-548-4891 FAX: 045-548-4892
Ehime Factory	357-3 Kitashinchi, Minato, Saijyo-shi, Ehime, Japan 793-0046 TEL : 0897-52-5211 FAX : 0897-52-5222
Aichi Factory	6-92, Sunarinishi, Aichi, Japan 497-0036 TEL : 0567-96-5300 FAX : 0567-96-5354

Apollo Seiko Group Service & Production Bases●

①USA, Canada Apollo Seiko Ltd. USA	3969 Lemon Creek Road, Bridgman, MI 49106, USA TEL: +1-269-465-3400 FAX: +1-269-465-3441 E-mail : info@apolloseiko.com https://www.apolloseiko.com
②Europe Apollo Seiko Europe B.V.	Rooseindsestraat 54 A 5705 BV HELMOND The Netherlands TEL: +31 492 792 856 FAX: +31 492 430032 E-mail : soldersolutions@apollo-seiko-europe.com https://www.apollo-seiko-europe.com
③Europe / Poland Apollo Seiko Europe Engineering Center	Grabiszyńska 251A Str, Wrocław, 53-234, Poland TEL: +48 717572172 E-mail : soldersolutions@apollo-seiko-europe.com https://www.apollo-seiko-europe.com
④Mexico Apollo Seiko Mexico S. DE R.L. DE C.V.	Carretera Nogales 4935 Bodega 64 San Juan de Ocotan Zapopan, Jalisco. CP. 45019 Mexico TEL: +523317752803 E-mail:contacto@apolloseiko.com.mx https://www.apolloseiko.com.mx
⑤Singapore Apollo Seiko Pte., Ltd.	10, Ubi Crescent, #05-85, Lobby E, Ubi Techpark, Singapore 408564 TEL: +65-6741-1918 E-mail : apollo@apolloseiko.com.sg http://www.apolloseiko.com.sg
⑥China Shanghai Apollo Seiko(Shanghai) industrial Corporation	Room102, Floor 1, building 1, no.555, Lianming road, Qibao town, Minhang district, Shanghai, China TEL: +86-21-6150-1698 FAX: +86-21-3221-2205 E-mail: apollo@apolloseiko.com.cn http://www.apolloseiko.com.cn
⑥Tianjin Apollo Seiko North China Office-Tianjin	Room2103, 21F, Gate2, Building Zeng1, Lidabolanyuan, Heiniucheng Avenue, Hexi District, Tianjin,China TEL: +86-22-2392-8371 FAX: +86-22-2392-8372
⑥Guangzhou Apollo Seiko South China Office-Guangzhou	Room801, Building NO.14 TianAn Headquarter Center, NO.555 Panyu Avenue North, Donghuan Street, Panyu, Guangzhou, China TEL: +86-20-3100-0698 FAX: +86-20-8483-1080
⑦Korea Apollo Seiko Korea Co.,Ltd.	36, Bucheon-ro 198beon-gil, Bucheon-si, Gyeonggi-do, 14557, Republic of Korea TEL: +82-(0)32-652-9959 FAX: +82-(0)32-52-9962 E-mail: apollo@apolloseiko.co.kr http://www.apolloseiko.co.kr
⑧Thailand Apollo Seiko South Asia Co.,Ltd.	88/56 moo 6 KingKeaw Rd., Racha Thewa, Bang Phli, Samutprakarn 10540, Thailand TEL: +66-(0)2-175-2318 FAX: +66-(0)2-175-2319 E-mail : sales-assa@apolloseiko.co.jp http://apolloseikosouthasia.com
⑨India iApollo Seiko Private Limited	#782, 3rd Main, 1st Cross BEML Layout, 5th Stage Rajarajeshwari Nagar, Bengaluru - 560 098, India TEL: +91-80-28611871 FAX: +91-80-28612021 E-mail:info@iapolloseiko.in http://www.apolloseiko.com.sg



Distributors

⑩ Taiwan Leaderseal Industrial Corp.	6F-3, No. 666, Sec. 2, Wucyuan, W. Road, Nantun Dist, Taichung, 408, Taiwan, R.O.C TEL: +886-4-2384-2233 FAX: +886-4-2384-2323
⑪ Vietnam VAN DAT Trading and Technology Join Stock Company	OF04-02, Vinhomes Westpoint, Pham Hung Str., Me Tri Ward, Nam Tu Liem Dist., Ha Noi, Viet Nam TEL: +84-9-4793-9299 FAX: +84-4-3662-5168
⑫ Philippines Trans-tec International Marketing Phils., Inc	Unit no 1101 Parkway Corporate Center, Corporate Avenue corner Parkway Place, Filinvest Corporate City, Alabang, Muntinlupa, 1781, Philippines TEL: +63(2)88430124 FAX: +63(2)884301245
⑬ India Accurex Solutions Pvt. Ltd.	#782, 3rd Main, 1 Cross BEML Layout, 5th Stage Rajarajeshwari Nagar Bengaluru - 560 098, India TEL: +91-80-28611871 FAX: +91-80-28612021
⑭ India FLEXTECH Automation	No.2, Kalieswarer Street, Arul Murugan Nagar Extn, Madipakkam, Chennai 600091. Tamil Nadu, India TEL: +91-95662 54420
⑮ United Kingdom Kaisertech Limited	Unit 12, M3 Trade Park, Manor Way Eastleigh, Hants SO50 9LA, UK TEL: +44-(0)23-8065-0065 FAX: +44-(0)23-8065-0060
⑯ Czech AMTECH, spol.sr.o.	Skrobarenska 506/2 617 00 Brno, Czech TEL: +420 541 225 215 FAX: +420 541 228 285
⑰ Hungary Tech Gear Kft.	Levendula str. 1. Building I-15. H-8000 Székesfehérvár, Hungary TEL: +36704201733
⑱ Poland PB Technik Sp. z o.o.	Zwolenska 27 Str, 04-761 Warsaw, Poland TEL: +48 22 615 83 44
⑲ Germany Selecs GmbH	Zum Burgstall 10, 85459 Berglern, Germany TEL: +49 (0) 876 273 77 484
⑳ France Orion industry	16 Chemin de la Guy - Z.A. 91160 Ballainvilliers, France TEL: + 33 169 345 311 FAX: + 33 169 093 183
㉑ Italy Cabelpiù Electronics	via Marconi, 2 • 20068 Peschiera Borromeo, Milano, Italy TEL: +39 02 55300792 FAX: +39 02 51657868
㉒ Mexico Repstronics Main Office	Av.Patria No.194, Jardines Vallarta, Zapopan, Jalisco. CP.45027 Mexico TEL/FAX: +52-333-122-0999
㉓ Mexico OCIR Technologies, Incorporated	PO Box 531523, San Diego, Ca. 92153 USA TEL: +1-(915)345-9228
㉔ Brazil Meguro Instrumentos Eletronicos Ltda	Rua Nilo, 251-ACLIMACAO CEP: 01533-010-SAO PAULO-SP, BRAZIL TEL: +55-11-3284-5322 FAX: +55-11-3284-4704



APOLLO SEIKO LTD.

These specifications may be changed for improvement without prior notice.